





HDMI Male Solder 19 Pin

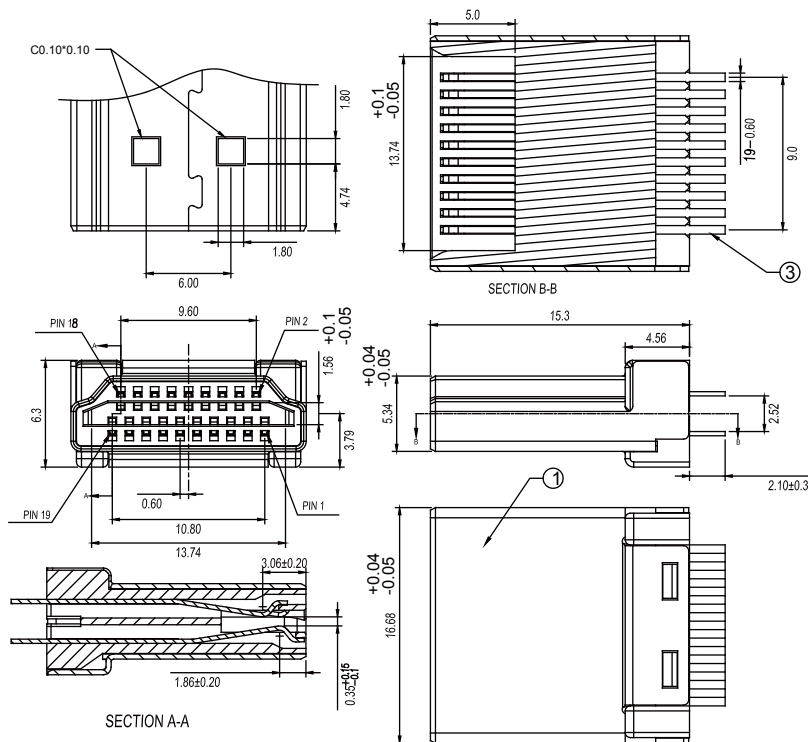

Material:
1.1 Housing: Thermoplastic UL94V-0 color: Gray
1.2 Contact: Phosphor bronze T=0.25mm.
1.3 Shell: Copper Alloy T=0.30mm.



Specifications:
2.1 Current rating: 0.5 A Max.
2.2 Voltage rating: 40 V ac(rms) Max.
2.3 Contact resistance: 60 mΩ Max.
2.4 Dielectric withstanding voltage: 500 V(ac) for 1 min.
2.5 Insulation resistance: 100 MΩ Min.
2.6 Operation temperature range: -20°C~85°C

Part No.: HDMI-M19 SB Y N 3-U

Selective 15u"

Nickel Shell

HDMI Male Solder 19 Pin

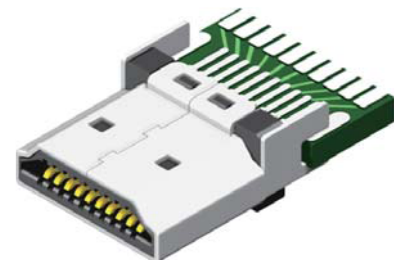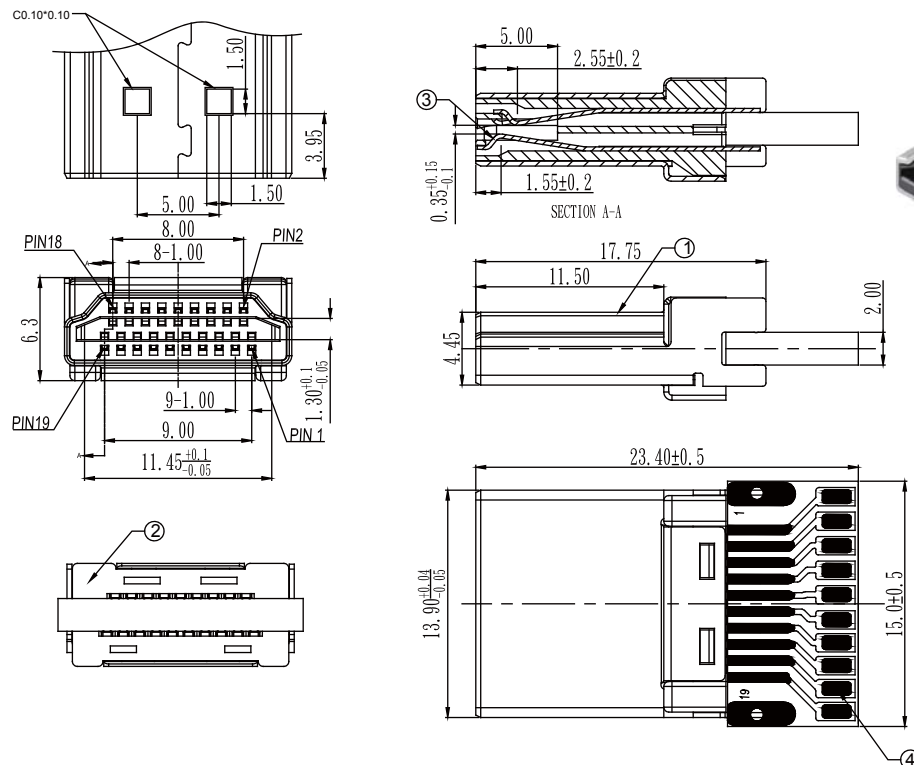

Material:
1.1 Housing: Thermoplastic UL94V-0 color: Gray
1.2 Contact: Phosphor bronze T=0.25mm.
1.3 Shell: Copper Alloy T=0.30mm.

Specifications:
2.1 Current rating: 0.5 A Max.
2.2 Voltage rating: 40 V ac(rms) Max.
2.3 Contact resistance: 60 mΩ Max.
2.4 Dielectric withstanding voltage: 500 V(ac) for 1 min.
2.5 Insulation resistance: 100 MΩ Min.
2.6 Operation temperature range: -20°C~85°C

Part No.: HDMI-M19 SB Y N 4-U

Selective 15u"

Nickel Shell