

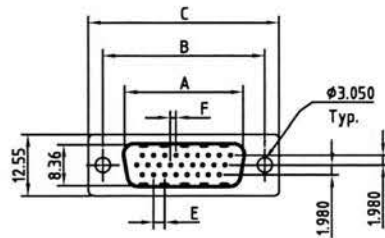



D-SUB. HIGH DENSITY CONNECTOR CRIMP TYPE TERMINAL & HOUSING





No. of Contacts	Dimensions(mm)					
	A	B	C	D	E	F
15	16.92	24.99	30.81	19.23	2.29	1.145
26	25.25	33.32	39.14	27.56	2.29	1.145
44	38.96	47.04	53.04	41.28	2.29	1.145
62	55.42	63.50	69.32	57.33	2.41	1.205



5223

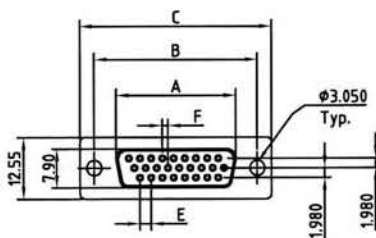

No. of Contacts	Dimensions(mm)					
	A	B	C	D	E	F
09	16.33	24.99	30.81	19.23	2.29	1.145
15	24.66	33.32	39.14	27.56	2.29	1.145
25	38.38	47.04	53.04	41.28	2.29	1.145
37	54.84	63.50	69.32	57.33	2.41	1.205



5224

SPECIFICATIONS

Current Rating: 3A

Contact Resistance: 25mΩ Max.

Insulation Resistance: 1000MΩ Min. at 500V

Dielectric Voltage: 1000V at 1 Minute

Operating Temperature: -55°C to +105°C

MATERIALS

Insulator: PBT, UL94V-0 Rated



Contact: Brass

Shell: Brass, Steel

Contact Plating: Gold Over Nickel Plated

Shell Plating: Tin Over Copper Plated

*RoHS & REACH compliant.

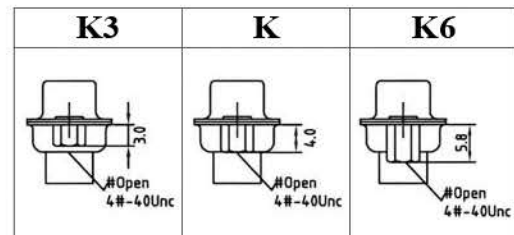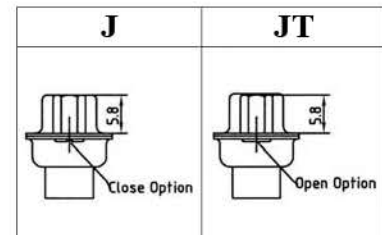


ORDERING INFORMATION:

P/N 52 XX - XX T B / XX


- CONNECTOR TYPE:
"23" MALE
"24" FEMALE
- NO. OF CONTACTS:
15, 26, 44, 62, 78
- MOUNTING OPTION:
" " Ø3.05MM THROUGH HOLES
OTHERS: K, K3, K6, J, JT

NOTE: CRIMPING TOOL P/N HT-213
INSERTION & EXTRACTION
TOOL P/N HT-101

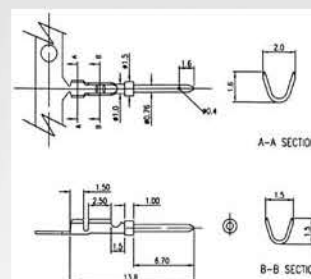

MALE TERMINAL:

5223-0.5K (500pcs/Reel)
5223-10K (10000pcs/Reel)
FOR AWG26-28

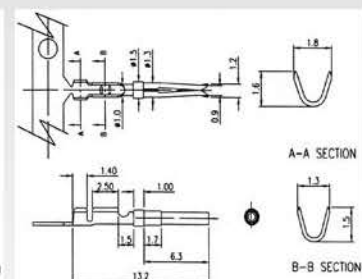

FEMALE TERMINAL:

5224-0.5K (500pcs/Reel)
5224-10K (10000pcs/Reel)
FOR AWG26-28