


D-SUB. CONNECTOR HIGH PROFILE STRAIGHT PCB MOUNT TYPE WITH MACHINED PINS & FERRITE

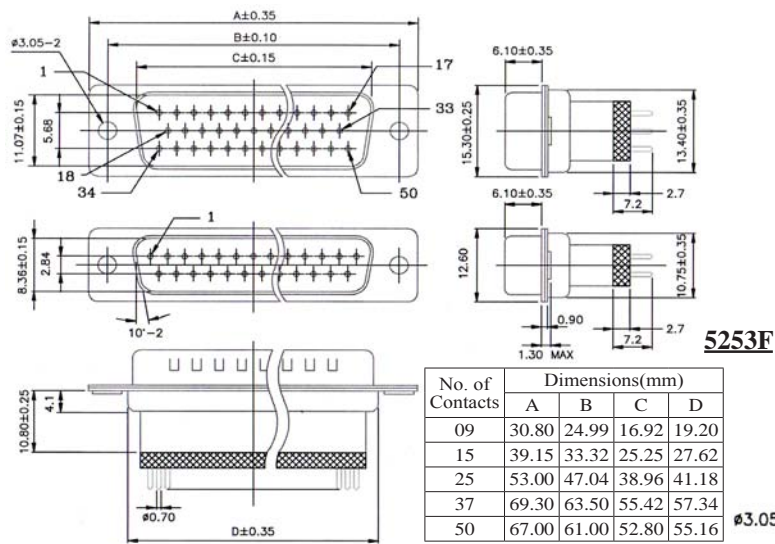

5253F

SPECIFICATIONS

Current Rating: 5A

Contact Resistance: 25mΩ Max.

Insulation Resistance: 1000MΩ Min. at 500V

Dielectric Voltage: 1000V at 1 Minute

Operating Temperature: -55°C to +105°C

MATERIALS

Insulator: PBT, UL94V-0 Rated


Contact: Brass

Shell: Brass, Steel



Contact Plating: Gold Over Nickel Plated

Shell Plating: Tin Over Copper Plated

***RoHS & REACH compliant.**

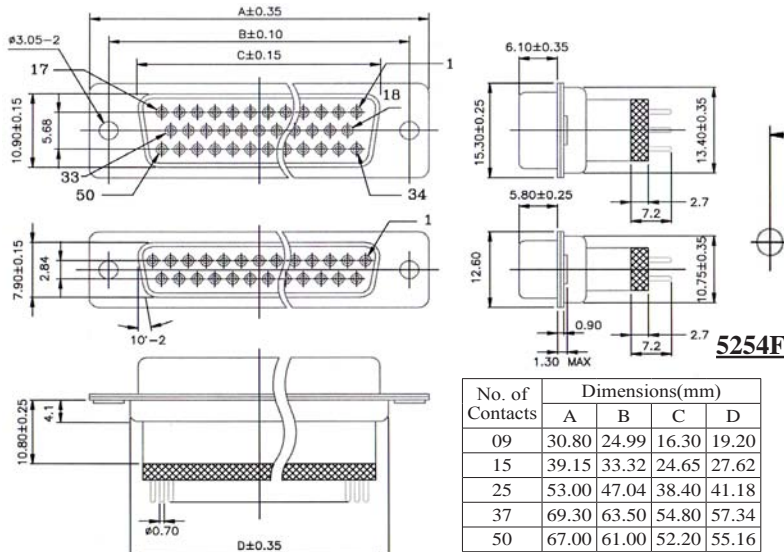

5254F

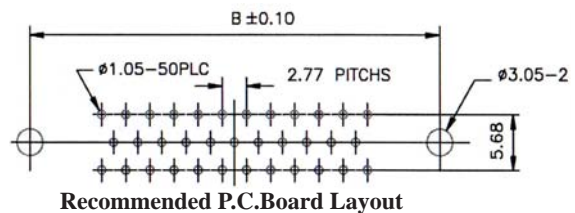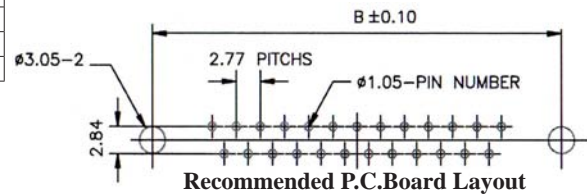

ORDERING INFORMATION:

P/N 5 2 1 X X F - 2 X X T B / 3 X X X

1. CONNECTOR TYPE:

"53" MALE
"54" FEMALE

2. NO. OF CONTACTS:

09, 15, 25, 37

3. MOUNTING OPTION:

" " Ø3.05MM THROUGH HOLES
"BR" BOARD LOCK
"BRJ" BOARD LOCK & SCREW