
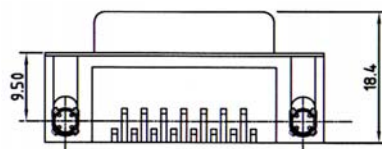

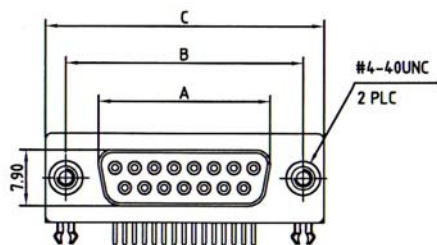
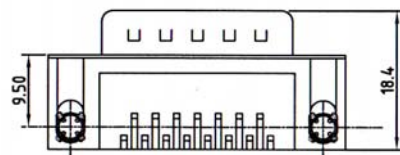



D-SUB. CONNECTOR RIGHT ANGLE TYPE WITH 4 PRONGED BOARDLOCKS (CONTACT EXTENSION: 7.2MM)

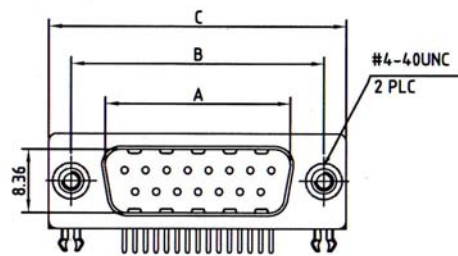

5113

No. of Contacts	Dimensions(mm)		
	A	B	C
09	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

5114

No. of Contacts	Dimensions(mm)		
	A	B	C
09	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.84	63.50	69.32

SPECIFICATIONS

Current Rating: 3.0 Amperes

Contact Resistance: 25mΩ Max.

Insulation Resistance: 1000MΩ Min. at 500V

Dielectric Voltage: 1000V at 1 Minute

Operating Temperature: -55°C to +105°C

MATERIALS

Insulator: PBT, UL94V-0 Rated


Contact: Brass

Shell: Brass, Steel

Contact Plating: Gold Over Nickel Plated

Shell Plating: Tin Over Copper Plated

***RoHS & REACH compliant.**

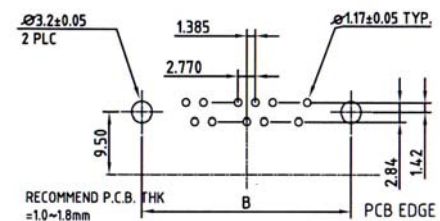

Recommended P.C. Board Layout

N	(BLANK)
NJ	NH

ORDERING INFORMATION:

P/N 5 1 $\frac{xx}{1}$ - $\frac{xx}{2}$ T B / $\frac{xx}{3}$

1. CONNECTOR TYPE:

"13" MALE

"14" FEMALE

2. NO. OF CONTACTS:

09, 15, 25, 37

3. MOUNTING OPTION:

" " LOCKED SCREWS (4.8MM)

"N" WITHOUT SCREWS (5.8MM)

"NH" LOOSE SCREWS (4.8MM)

"NJ" ASSEMBLED SCREWS (4.8MM)