
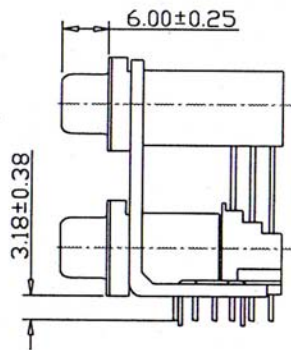


DUAL PORT HD15/HD15 CONNECTOR RIGHT ANGLE TYPE (FOOTPRINT= 8.89MM)

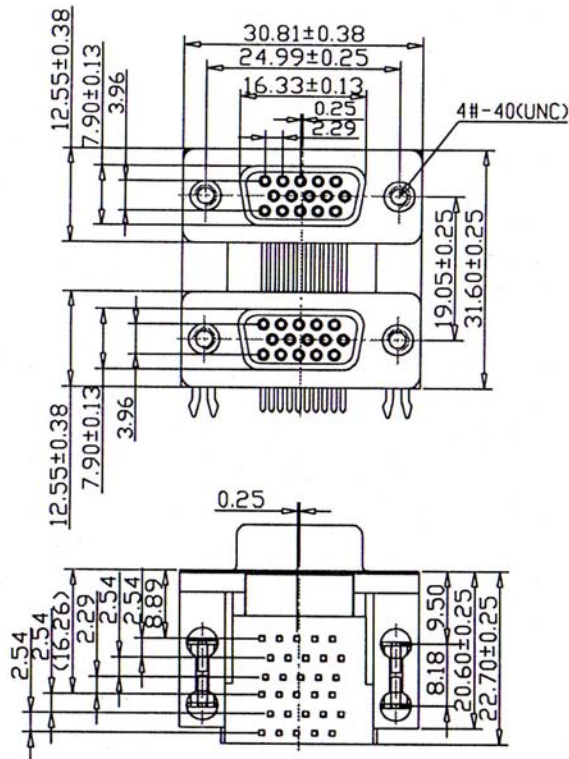

SPECIFICATIONS

Current Rating: 3.0 Amperes

Contact Resistance: 25mΩ Max.

Insulation Resistance: 1000MΩ Min. at 500V

Dielectric Voltage: 1000V at 1 Minute

Operating Temperature: -55°C to +105°C

MATERIALS

Insulator: PBT, UL94V-0 Rated


Contact: Brass

Shell: Brass, Steel

Contact Plating: Gold Over Nickel Plated

Shell Plating: Tin Over Copper Plated

*RoHS & REACH compliant.

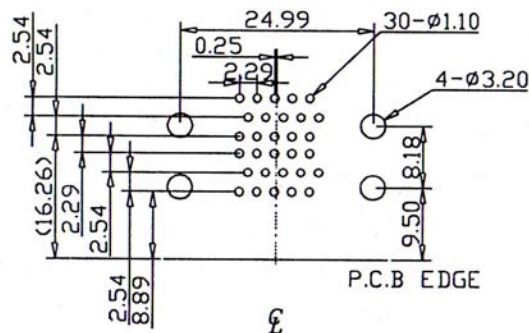

Recommended P.C.Board Layout

ORDERING INFORMATION:

P/N DPH-HD15 $\frac{XX}{12}$ / $\frac{XXX}{34}$

1. TOP CONNECTOR TYPE:

"F" FEMALE

"M" MALE

2. BOTTOM CONNECTOR TYPE:

"F" FEMALE

"M" MALE

3. SPACING BETWEEN PORTS:

"A" 19.05MM(0.750")

"C" 15.88MM(0.625")





4. FLANGE MOUNTING OPTION:

"N" " #4-40UNC THREADED HOLES
WITHOUT HEX SCREW BOLTS

"NH" #4-40UNC THREADED HOLES
WITH BULK-PACKED (LOOSE)
#4-40UNC HEX SCREW BOLTS

"NJ" #4-40UNC THREADED HOLES
WITH INSTALLED (ASSEMBLED)
#4-40UNC HEX SCREW BOLTS

DUAL PORT HD26/HD26 CONNECTOR RIGHT ANGLE TYPE (FOOTPRINT= 8.89MM)

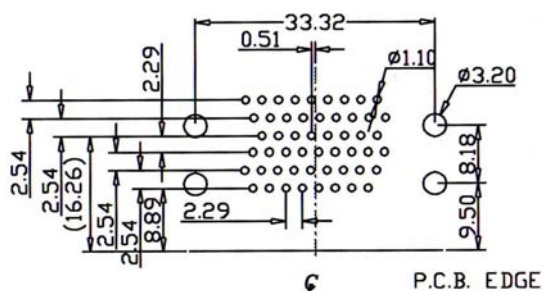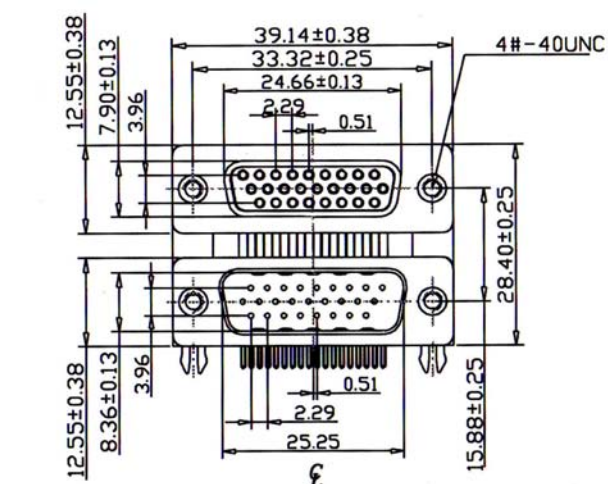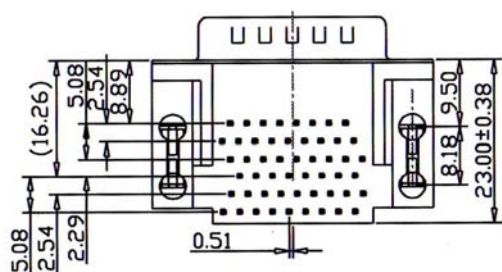

Recommended P.C.Board Layout

SPECIFICATIONS

Current Rating: 3.0 Amperes

Contact Resistance: 25mΩ Max.

Insulation Resistance: 1000MΩ Min. at 500V

Dielectric Voltage: 1000V at 1 Minute

Operating Temperature: -55°C to +105°C

MATERIALS

Insulator: PBT, UL94V-0 Rated

Contact: Brass

Shell: Brass, Steel

Contact Plating: Gold Over Nickel Plated

Shell Plating: Tin Over Copper Plated

***RoHS & REACH compliant.**

ORDERING INFORMATION:

P/N DPH-HD 26 xx/xxx
 12 34

1. TOP CONNECTOR TYPE:

"F" FEMALE

"M" MALE

- ## 2. BOTTOM CONNECTOR TYPE:

"F" FEMALE

"M" MALE

- ### 3. SPACING BETWEEN PORTS:

"A" 19.05MM(0.750")

"C" 15.88MM(0.625")

- #### 4. FLANGE MOUNTING OPTION:

"N " #4-40UNC THREADED HOLES
WITHOUT HEX SCREW BOLTS

"NH" #4-40UNC THREADED HOLES
WITH BULK-PACKED (LOOSE)
#4-40UNC HEX SCREW BOLTS

"NJ" #4-40UNC THREADED HOLES
WITH INSTALLED (ASSEMBLED)
#4-40UNC HEX SCREW BOLTS