




DUAL PORT DB9/DB25 CONNECTOR RIGHT ANGLE TYPE (FOOTPRINT= 8.08MM)

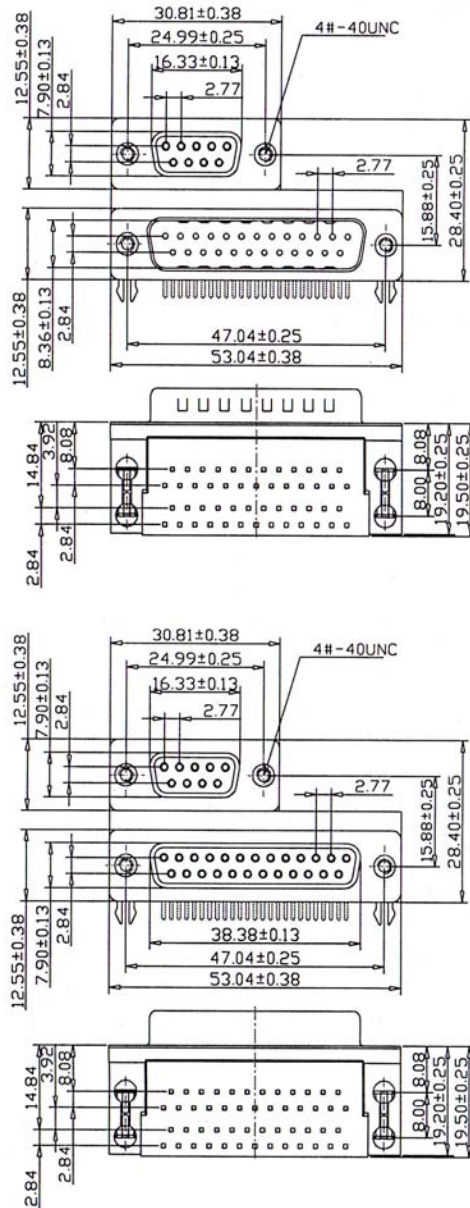

DPA-9F25M/Cxx



DPA-9F25F/Cxx

SPECIFICATIONS

Current Rating: 3.0 Amperes

Contact Resistance: 25mΩ Max.

Insulation Resistance: 1000MΩ Min. at 500V

Dielectric Voltage: 1000V at 1 Minute

Operating Temperature: -55°C to +105°C

MATERIALS

Insulator: PBT, UL94V-0 Rated


Contact: Brass

Shell: Brass, Steel

Contact Plating: Gold Over Nickel Plated

Shell Plating: Tin Over Copper Plated

***RoHS & REACH compliant.**

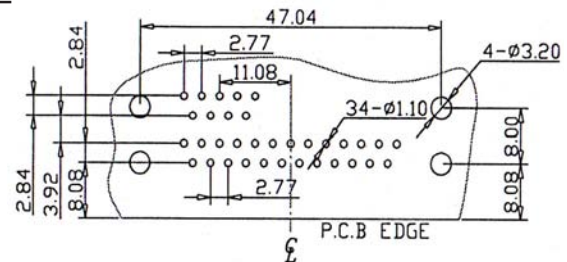

Recommended P.C. Board Layout

ORDERING INFORMATION:

P/N DPA-9 $\frac{x}{1}$ 25 $\frac{x}{2}$ / $\frac{x}{3}$ $\frac{x}{4}$

1. TOP CONNECTOR TYPE:

"F" FEMALE

"M" MALE

2. BOTTOM CONNECTOR TYPE:

"F" FEMALE

"M" MALE

3. SPACING BETWEEN PORTS:

"C" 15.88MM(0.625")


4. FLANGE MOUNTING OPTION:

"N" " #4-40UNC THREADED HOLES WITHOUT HEX SCREW BOLTS

"NH" #4-40UNC THREADED HOLES WITH BULK-PACKED (LOOSE) #4-40UNC HEX SCREW BOLTS

"NJ" #4-40UNC THREADED HOLES WITH INSTALLED (ASSEMBLED) #4-40UNC HEX SCREW BOLTS

DUAL PORT DB25/DB9 CONNECTOR RIGHT ANGLE TYPE (FOOTPRINT= 8.08MM)


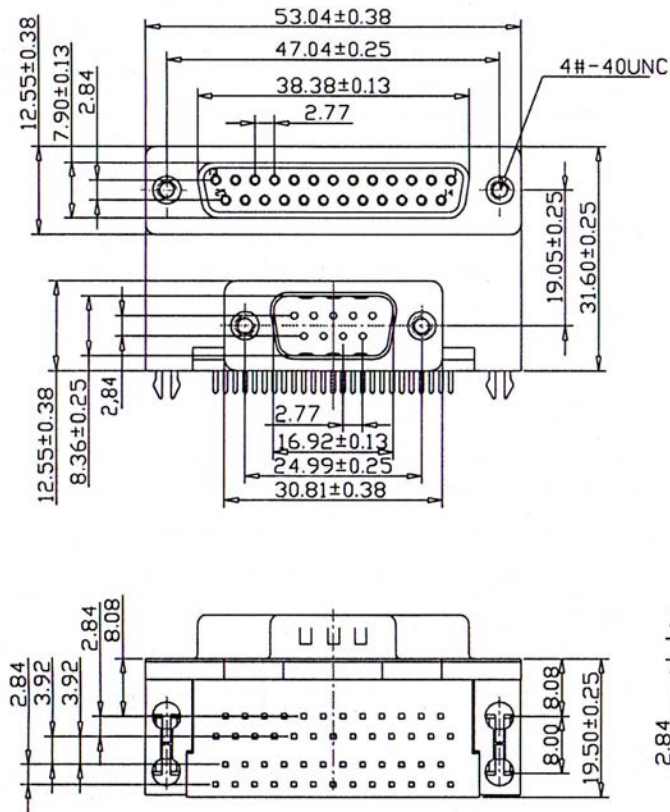


SPECIFICATIONS

Current Rating: 3.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55°C to +105°C

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Gold Over Nickel Plated
Shell Plating: Tin Over Copper Plated
***RoHS & REACH compliant.**

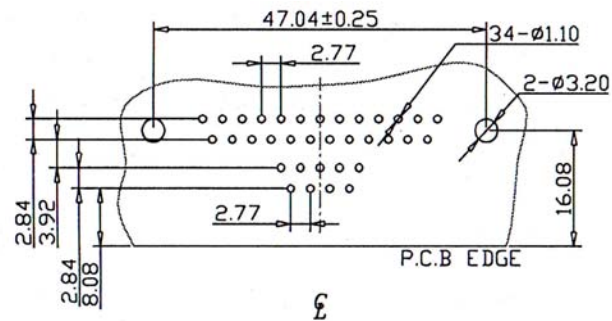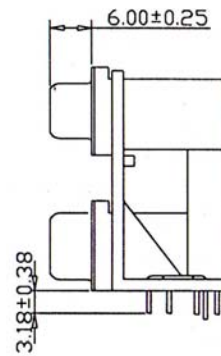

Recommended P.C. Board Layout

ORDERING INFORMATION:

P/N D P - 2 5 $\frac{x}{1}$ 9 $\frac{x}{2}$ / $\frac{x}{3}$ $\frac{x}{4}$

1. TOP CONNECTOR TYPE:

"F" FEMALE
"M" MALE

2. BOTTOM CONNECTOR TYPE:

"F" FEMALE
"M" MALE

3. SPACING BETWEEN PORTS:

"A" 19.05MM(0.750")

4. FLANGE MOUNTING OPTION:

"N" " #4-40UNC THREADED HOLES
WITHOUT HEX SCREW BOLTS

"NH" #4-40UNC THREADED HOLES
WITH BULK-PACKED (LOOSE)
#4-40UNC HEX SCREW BOLTS

"NJ" #4-40UNC THREADED HOLES
WITH INSTALLED (ASSEMBLED)
#4-40UNC HEX SCREW BOLTS