
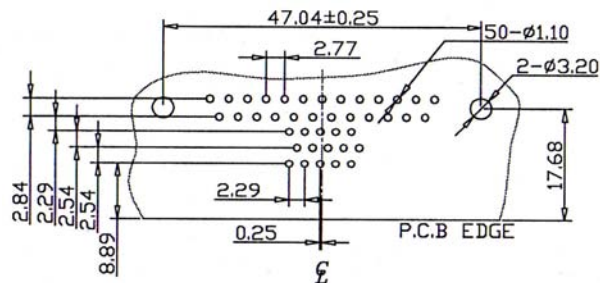
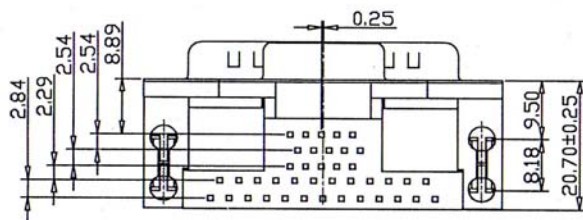



DUAL PORT DB25/HD15 CONNECTOR RIGHT ANGLE TYPE (FOOTPRINT= 8.89MM)

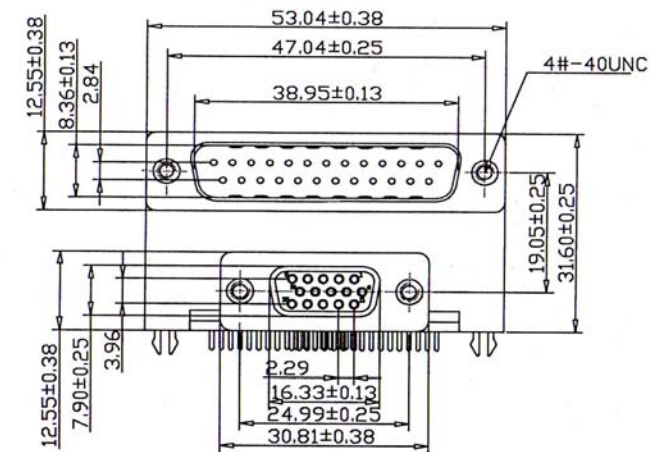

Recommended P.C.Board Layout

SPECIFICATIONS

Current Rating: 3.0 Amperes
Contact Resistance: 25mΩ Max.
Insulation Resistance: 1000MΩ Min. at 500V
Dielectric Voltage: 1000V at 1 Minute
Operating Temperature: -55°C to +105°C

MATERIALS

Insulator: PBT, UL94V-0 Rated
Contact: Brass
Shell: Brass, Steel
Contact Plating: Gold Over Nickel Plated
Shell Plating: Tin Over Copper Plated
***RoHS & REACH compliant.**

ORDERING INFORMATION:

P/N DPH - 25 $\frac{x}{1}$ HD 15 $\frac{x}{2} / \frac{x}{3} \frac{x}{4}$

1. TOP CONNECTOR TYPE:

"F" FEMALE
 "M" MALE

2. BOTTOM CONNECTOR TYPE:

"F" FEMALE
 "M" MALE

3. SPACING BETWEEN PORTS:

"A" 19.05MM(0.750")

4. FLANGE MOUNTING OPTION:

"N" " #4-40UNC THREADED HOLES
 WITHOUT HEX SCREW BOLTS

"NH" #4-40UNC THREADED HOLES
 WITH BULK-PACKED (LOOSE)
 #4-40UNC HEX SCREW BOLTS

"NJ" #4-40UNC THREADED HOLES
 WITH INSTALLED (ASSEMBLED)
 #4-40UNC HEX SCREW BOLTS