





SIDE ENTRY EMBEDDED MODULAR PCB JACK WITH LED 8P PROFILE=11.12MM (FULLY SHIELDED)

SPECIFICATIONS

Insulation Resistance: 500MΩ Min.
Contact Resistance: 20mΩ Max.
Rating Current: 1.5A Max.
Rating Voltage: 120V AC.
Dielectric Voltage: 1000 Vrms 60 Sec. Min.
Temperature Range: -40°C / +85°C
Durability: 500 Mating cycles Min.

MATERIALS

Housing: Nylon (UL 94V-0)
Soldering Temperature: 260°C
Color: Black
Spring Wire: Phosphor Bronze
 Gold plating Over Nickel
All materials must be RoHS compliant.

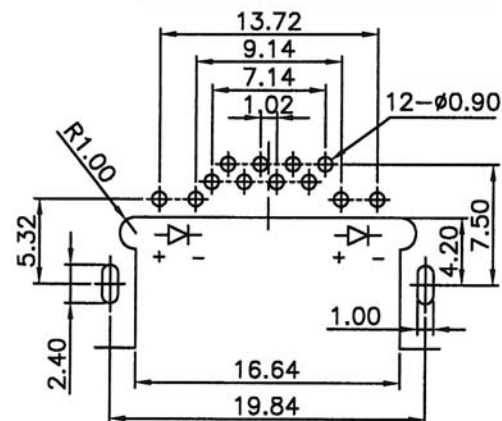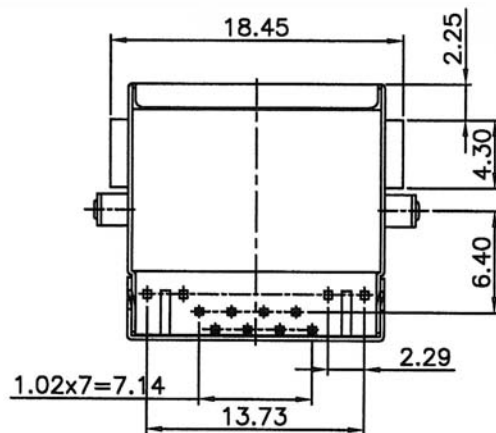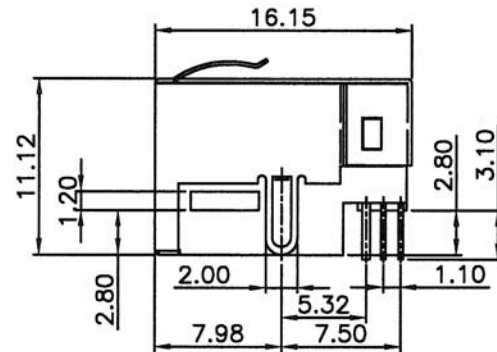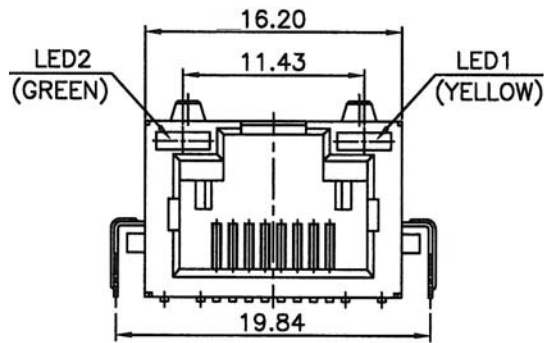

Recommended P.C.Board Layout
(TOP VIEW)

ORDERING INFORMATION:

P/N M J B 7 - $\frac{x}{1} \frac{x}{2} \frac{x}{3}$ B $\frac{x}{1} \frac{x}{2}$

1. NO. OF POSITIONS & CONTACTS:
 "88" 8P8C
 "84" 8P4C
2. CONTACT FINISH:
 "A" 6 MICROINCH GOLD
 "B" 15 MICROINCH GOLD
 "C" 30 MICROINCH GOLD
 "D" 50 MICROINCH GOLD
3. COLORS OF LED:
 "NN" LED1: GREEN & LED2: GREEN
 "NY" LED1: GREEN & LED2: YELLOW
 "YN" LED1: YELLOW & LED2: GREEN
 "YY" LED1: YELLOW & LED2: YELLOW
 "XX" W/O LED