SIDE ENTRY 4-PORT UP LATCH MODULAR PCB JACK WITH LED 8P PROFILE=13.20MM (FULLY SHIELDED)

SPECIFICATIONS

Insulation Resistance: 500MΩ Min.
Contact Resistance: 20mΩ Max.
Rating Current: 1.5A Max.
Rating Voltage: 120V AC.
Dielectric Voltage: 1000 Vrms 60 Sec. Min.
Temperature Range: -40ºc / +85ºc
Durability: 500 Mating cycles Min.

MATERIALS

Housing: PBT Glass Filled (UL 94V-0)
Soldering Temperature: 235ºc
Color: Black
Spring Wire: Phosphor Bronze
Gold plating Over Nickel
Shield: Brass plating Nickel Alloy
All materials must be RoHS compliant.

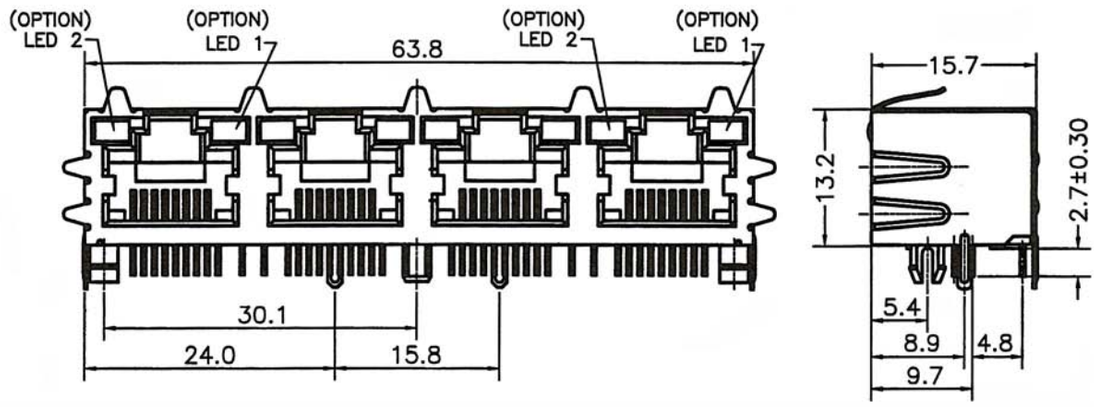

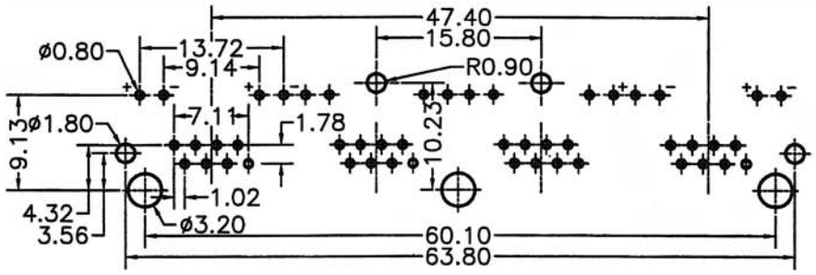

Recommended P.C.Board Layout
(Component Side Shown)

ORDERING INFORMATION:

P/N M J $\frac{x\,x}{1}$ - $\frac{8\,8}{2}$ $\frac{x}{3}$ B $\frac{x\,x}{4}$ $\frac{x\,x}{5}$

1. TYPE OF PANEL GROUNDS (TABS):
   "9Y" NO TAB
   "9Z" TOP TABS
   "4A" SIDE TABS
   "4B" TOP TABS & SIDE TABS
2. NO. OF POSITIONS & CONTACTS:
   "88" 8P8C
3. CONTACT FINISH:
   "A" 6 MICROINCH GOLD
   "B" 15 MICROINCH GOLD
   "C" 30 MICROINCH GOLD
   "D" 50 MICROINCH GOLD
4. COLORS OF LED:
   "XX" W/O LED
   "NY" LED1: GREEN, LED2: YELLOW
   "NN" LED1: GREEN, LED2: GREEN
   "YN" LED1: YELLOW, LED2: GREEN
   "YY" LED1: YELLOW, LED2: YELLOW
5. NO. OF PORTS:
   04