


SIDE ENTRY 2-PORT DOUBLE LEVEL MODULAR PCB JACK 6P PROFILE=24.84MM (UNSHIELDED)

SPECIFICATIONS

Insulation Resistance: 500MΩ Min.
Contact Resistance: 20mΩ Max.
Rating Current: 1.5A Max.
Rating Voltage: 120V AC.
Dielectric Voltage: 1000 Vrms 60 Sec. Min.
Temperature Range: -40°C / +85°C
Durability: 500 Mating cycles Min.

MATERIALS

Housing: PBT Glass Filled (UL 94V-0)
Soldering Temperature: 235°C
Color: Black
Spring Wire: Phosphor Bronze
 Gold plating Over Nickel
All materials must be RoHS compliant.

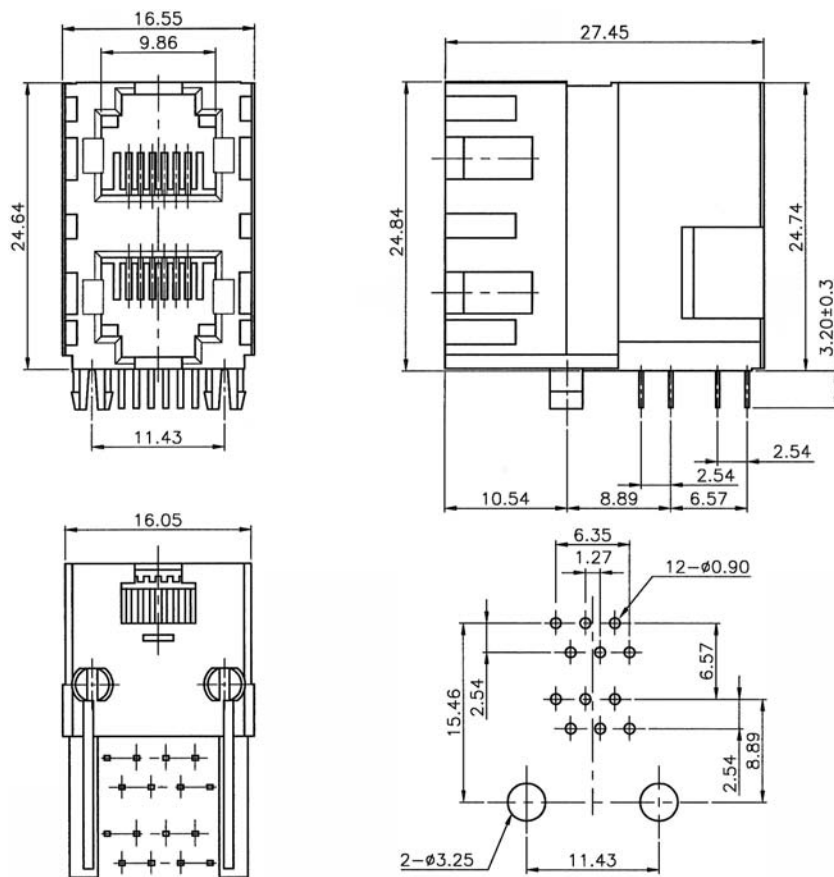

Recommended P.C.Board Layout (TOP VIEW)

ORDERING INFORMATION:

P/N MJ50 - $\frac{66}{1} \times \frac{B}{2} \frac{02}{3}$

1. NO. OF POSITIONS & CONTACTS:
"66" 6P6C
2. CONTACT FINISH:
"A" 6 MICROINCH GOLD
"B" 15 MICROINCH GOLD
"C" 30 MICROINCH GOLD
"D" 50 MICROINCH GOLD
3. NO. OF PORTS:
02





SIDE ENTRY 4-PORT DOUBLE LEVEL MODULAR PCB JACK 6P PROFILE=24.84MM (UNSHIELDED)

SPECIFICATIONS

Insulation Resistance: 500MΩ Min.
Contact Resistance: 20mΩ Max.
Rating Current: 1.5A Max.
Rating Voltage: 120V AC.
Dielectric Voltage: 1000 Vrms 60 Sec. Min.
Temperature Range: -40°C / +85°C
Durability: 500 Mating cycles Min.

MATERIALS

Housing: PBT Glass Filled (UL 94V-0)
Soldering Temperature: 235°C
Color: Black
Spring Wire: Phosphor Bronze
 Gold plating Over Nickel
All materials must be RoHS compliant.

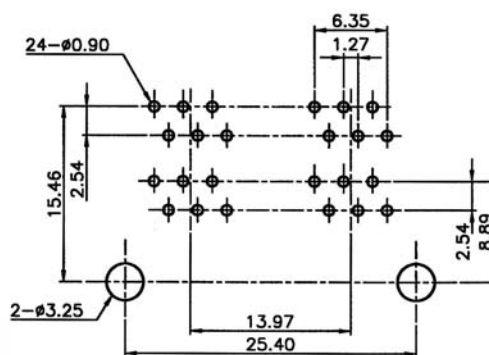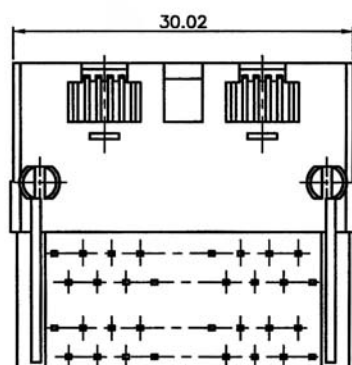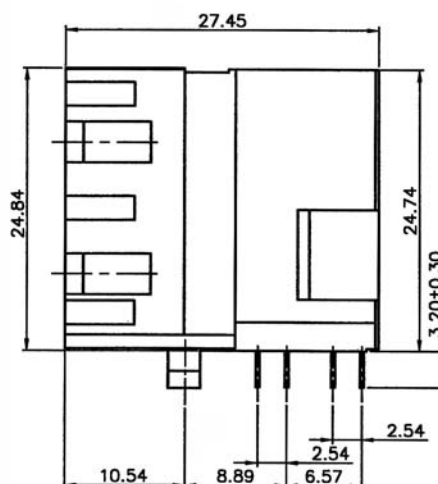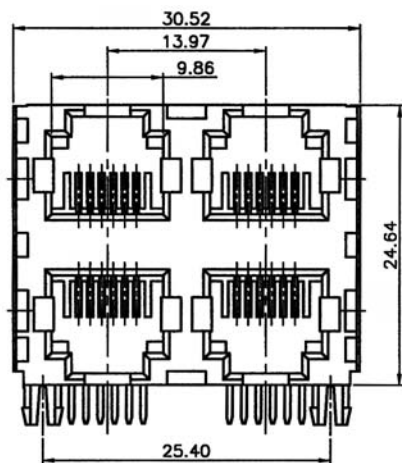

Recommended P.C.Board Layout (TOP VIEW)

ORDERING INFORMATION:

P/N MJ50 - $\frac{66}{1} \times \frac{B}{2} \frac{04}{3}$

1. NO. OF POSITIONS & CONTACTS:
"66" 6P6C
2. CONTACT FINISH:
"A" 6 MICROINCH GOLD
"B" 15 MICROINCH GOLD
"C" 30 MICROINCH GOLD
"D" 50 MICROINCH GOLD
3. NO. OF PORTS:
04





SIDE ENTRY 6-PORT DOUBLE LEVEL MODULAR PCB JACK 6P PROFILE=24.84MM (UNSHIELDED)

SPECIFICATIONS

Insulation Resistance: 500MΩ Min.
Contact Resistance: 20mΩ Max.
Rating Current: 1.5A Max.
Rating Voltage: 120V AC.
Dielectric Voltage: 1000 Vrms 60 Sec. Min.
Temperature Range: -40°C / +85°C
Durability: 500 Mating cycles Min.

MATERIALS

Housing: PBT Glass Filled (UL 94V-0)
Soldering Temperature: 235°C
Color: Black
Spring Wire: Phosphor Bronze
 Gold plating Over Nickel
All materials must be RoHS compliant.

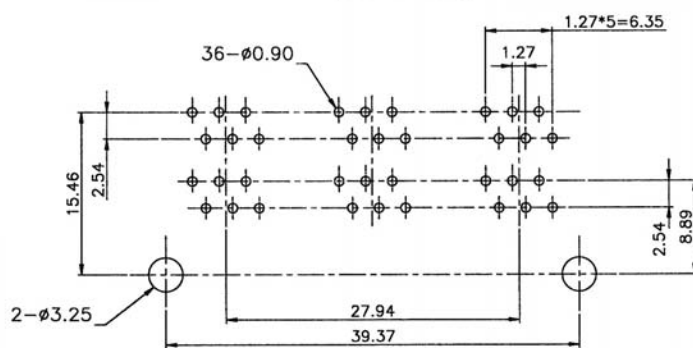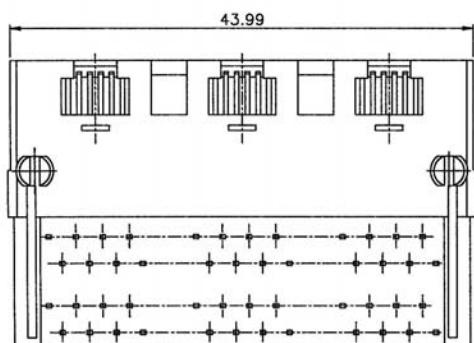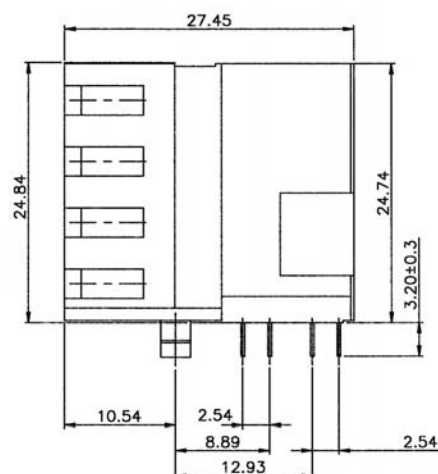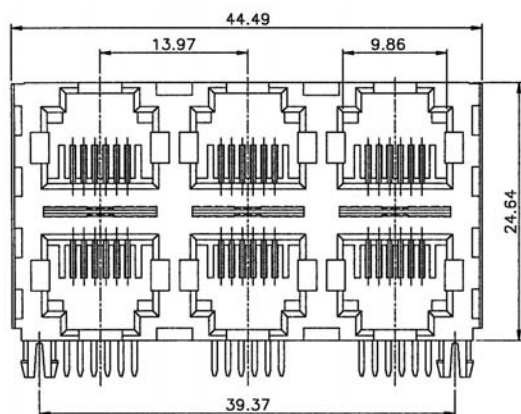

Recommended P.C. Board Layout
(TOP VIEW)

ORDERING INFORMATION:

P/N MJ50 - $\frac{66}{1} \times \frac{B}{2} \frac{06}{3}$

1. NO. OF POSITIONS & CONTACTS:
"66" 6P6C
2. CONTACT FINISH:
"A" 6 MICROINCH GOLD
"B" 15 MICROINCH GOLD
"C" 30 MICROINCH GOLD
"D" 50 MICROINCH GOLD
3. NO. OF PORTS:
06





SIDE ENTRY 8-PORT DOUBLE LEVEL MODULAR PCB JACK 6P PROFILE=24.84MM (UNSHIELDED)

SPECIFICATIONS

Insulation Resistance: 500MΩ Min.
Contact Resistance: 20mΩ Max.
Rating Current: 1.5A Max.
Rating Voltage: 120V AC.
Dielectric Voltage: 1000 Vrms 60 Sec. Min.
Temperature Range: -40°C / +85°C
Durability: 500 Mating cycles Min.

MATERIALS

Housing: PBT Glass Filled (UL 94V-0)
Soldering Temperature: 235°C
Color: Black
Spring Wire: Phosphor Bronze
 Gold plating Over Nickel
All materials must be RoHS compliant.

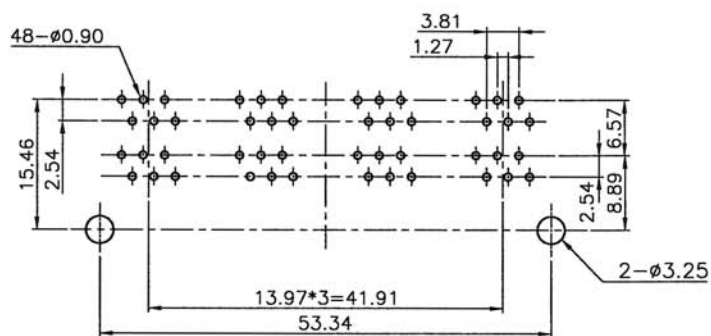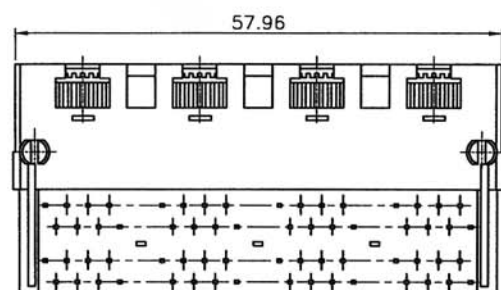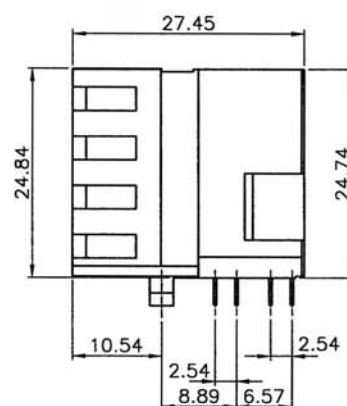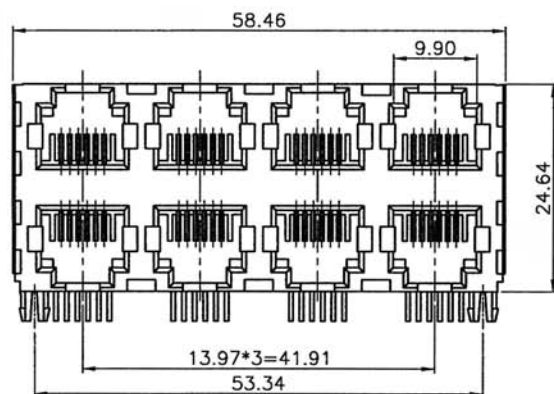

Recommended P.C. Board Layout (TOP VIEW)

ORDERING INFORMATION:

P/N MJ50 - $\frac{66}{1} \times \frac{B}{2} \frac{08}{3}$

1. NO. OF POSITIONS & CONTACTS:
"66" 6P6C
2. CONTACT FINISH:
"A" 6 MICROINCH GOLD
"B" 15 MICROINCH GOLD
"C" 30 MICROINCH GOLD
"D" 50 MICROINCH GOLD
3. NO. OF PORTS:
08





SIDE ENTRY 10-PORT DOUBLE LEVEL MODULAR PCB JACK 6P PROFILE=24.84MM (UNSHIELDED)

SPECIFICATIONS

Insulation Resistance: 500MΩ Min.
Contact Resistance: 20mΩ Max.
Rating Current: 1.5A Max.
Rating Voltage: 120V AC.
Dielectric Voltage: 1000 Vrms 60 Sec. Min.
Temperature Range: -40°C / +85°C
Durability: 500 Mating cycles Min.

MATERIALS

Housing: PBT Glass Filled (UL 94V-0)
Soldering Temperature: 235°C
Color: Black
Spring Wire: Phosphor Bronze
 Gold plating Over Nickel
All materials must be RoHS compliant.

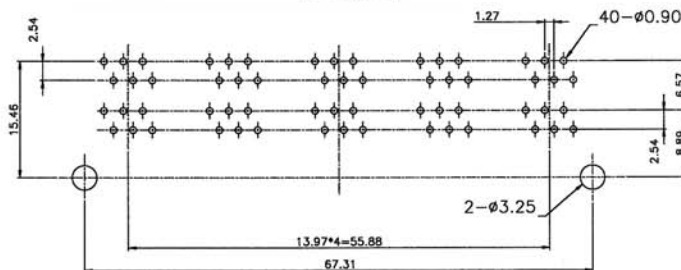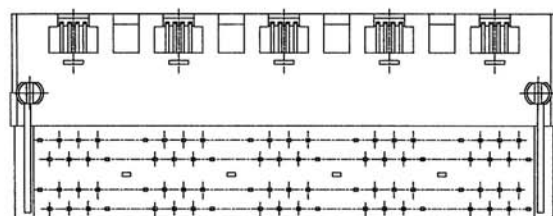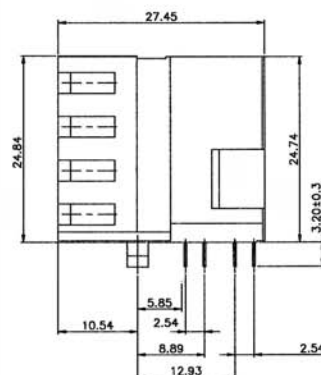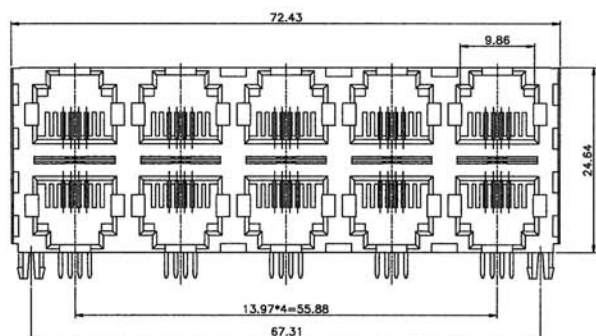

Recommended P.C.Board Layout
(TOP VIEW)

ORDERING INFORMATION:

P/N MJ50 - $\frac{66}{1} \times \frac{B}{2} \frac{10}{3}$

1. NO. OF POSITIONS & CONTACTS:
"66" 6P6C
2. CONTACT FINISH:
"A" 6 MICROINCH GOLD
"B" 15 MICROINCH GOLD
"C" 30 MICROINCH GOLD
"D" 50 MICROINCH GOLD
3. NO. OF PORTS:
10