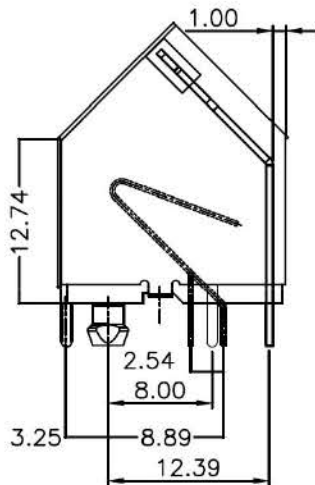
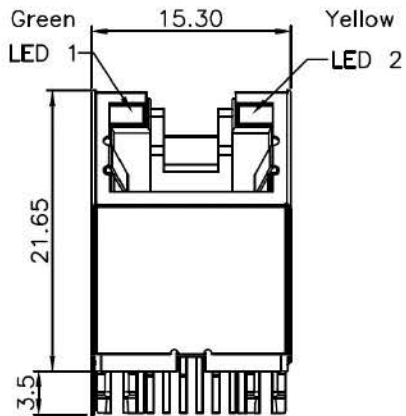


Electrical:

- 1.Voltage Rating:125 Vac Rms.
- 2.Current Rating:1.5 Amp.
- 3.Contact Resistance:40 Milliohms Max.
- 4.Insulation Resistance:1000 Megohms Min @500 Vdc.
- 5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

Mechanical:

- 1.Operating:750 Cycles Min.

Environmental:

- 1.Storage:-40°C To +85°C.
- 2.Operation:-20°C To +75°C.

Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

MATERIALS:

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.

CONTACTS: PHOSPHOR BRONZE


PLATING: GOLD PLATING OVER NICKEL IN CONTACT.

TIN PLATING OVER NICKEL IN SOLDER AREA.


SHIELDED: BRASS WITH NICKEL PLATED

ORDER INFORMATION:

PART NO.	CONTACT FINISH
MJ75-88ABNY	6 MICROINCH GOLD
MJ75-88BBNY	15 MICROINCH GOLD
MJ75-88CBNY	30 MICROINCH GOLD
MJ75-88DBNY	50 MICROINCH GOLD



PCB LAYOUT/TOP VIEW

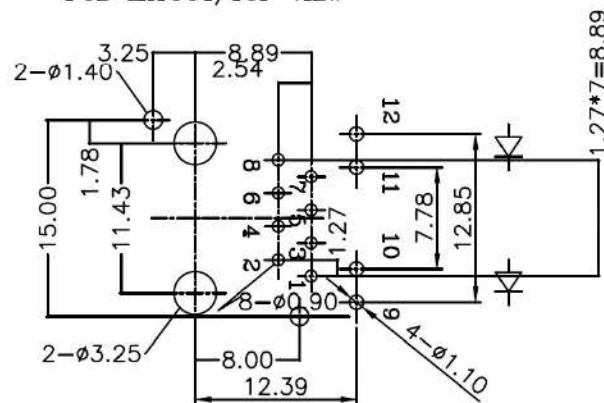

DIMENSIONS ARE IN MILLIMETERS		Ratioplast Electronics		RoHS COMPLIANT	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NO.	MJ75-88xBNY	TITLE: FULLY SHIELDED 45 DEGREE RJ45 (8P8C) MODULAR JACK WITH LED TYPE LED1:GREEN & LED2:YELLOW	
LINEAR	0.0±0.25	DATE	July / 20 / 2015		
	0.00±0.15				
ANGLES	± 3	NOT SCALED DRAWING		DRAWING NO.	MJ75-88xBNY