






New



Electronics | OptoElectronics

„Modular Jack 45“ Shielded, 8P8C LED's

 **Green** /  **Yellow**

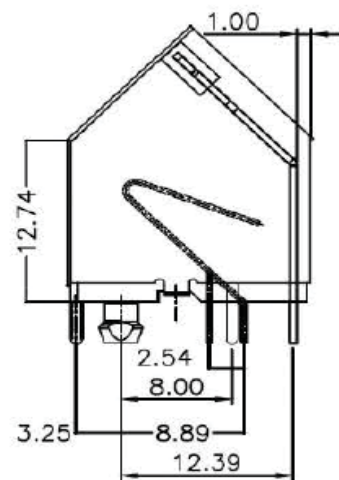
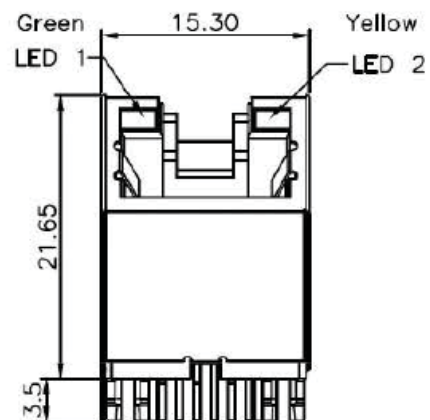


- Electrical
- Voltage Rating: 125Vac Rms.
- Current rating: 1,5 A
- Contact Resistance: 1000 MΩ

- Mechanical
- Operating: 750 cycles min.

- Enviromental
- Storage: -40°C to +85°C
- Operating: -20°C to +75°C

- Material: Thermoplastic UL94V-0
- Contacts: Phosphor Bronze
- Plating: Gold plating in contact area
Tin plating in solder area
- Shilded: Brass with nickel plated

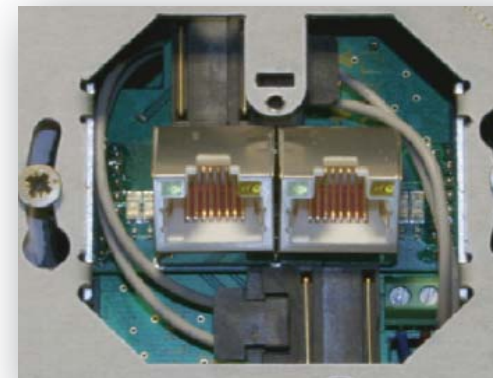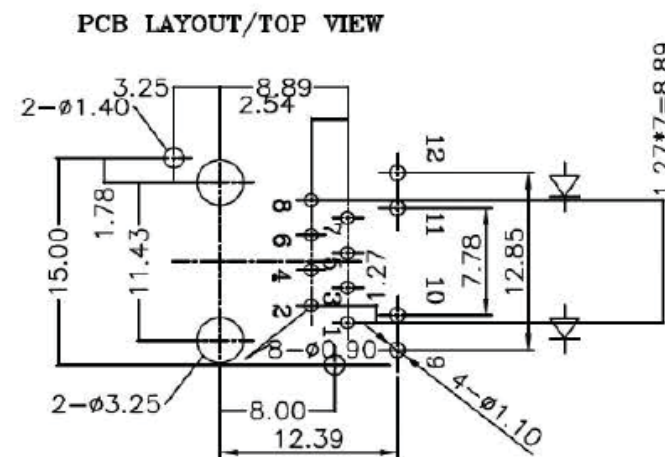

Order Code:

MJ75-88ABNY (06 micro inch Gold) (standard)
MJ75-88BBNY (15 micro inch Gold)
MJ75-88CBNY (30 micro inch Gold)
MJ75-88DBNY (50 micro inch Gold)