

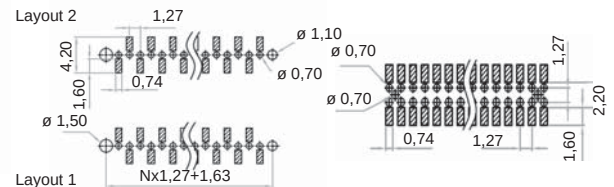

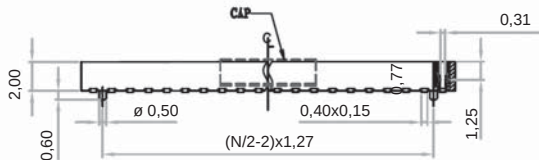

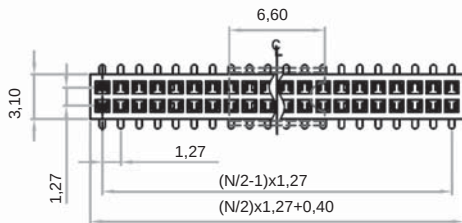

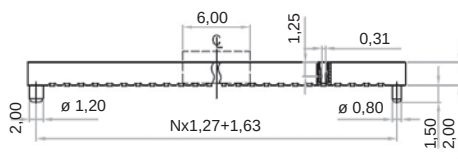


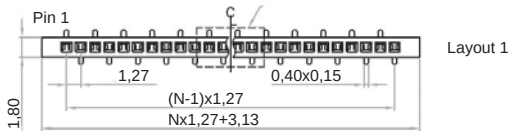

### SMD Buchsenleisten Raster 1,27mm / SMT Female Header pitch 1,27mm

## Serie 127



Empfohlenes Leiterplatten Layout  
Recommended P.C.B. Layout  
(PCB Tolerance  $\pm 0,05$ )

Technische Daten / Technical Data  
Isolierkörper / Insulator  
Kontaktmaterial / Contact material  
Nennspannung / Current Voltage  
Nennstrom / Current Rating  
Temperaturbereich / Temperatur Range  
Lötwärmebeständigkeit / Resistance soldering

Nylon 6T (UL94-V0)  
Kupfer / Copper alloy  
500V AC  
1 A  
-40°C...+105°C  
235°C (30-60 sec.)  
260°C (10 sec.)

weitere Informationen auf Anfrage / more information on request

Bestellbeispiel  
How to order

Bitte ersetzen Sie X durch unten aufgeführten Code  
Please replace X with coding listed below

00= mit Positionierhilfe / with locating peg  
01= ohne Positionierhilfe / without locating peg

Veredelung / Plating  
FL= Flash vergoldet / flash gold plating  
(andere Veredelungen auf Anfrage / other platings on request)

Anzahl Reihe / Number of row  
1= 1-reihig / 1-row 2= 2-reihig / 2-row

Ausführung / Version  
1= stehend / standing

Raster / Pitch  
1= 1,27mm 9= Sonderraster / other pitch

0= 2-reihig / 2-row 1= Layout 1 (1-reihig / 1-row) 2= Layout 2 (1-reihig / 1-row)

Polzahl / Number of contacts  
03...40 (1-reihig / 1-row) 06...80 (2-reihig / 2-row)

Pick and Place Pad option  
0= ohne / without PP-Pad 1= mit / with PP-Pad

Verpackung / Packaging  
1=Stange / Tube 2=Rolle / Reel (auf Anfrage / on request)

127 XX XX X 1 X X X X - X X