

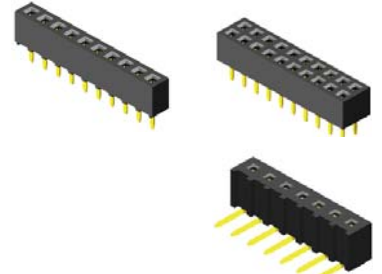


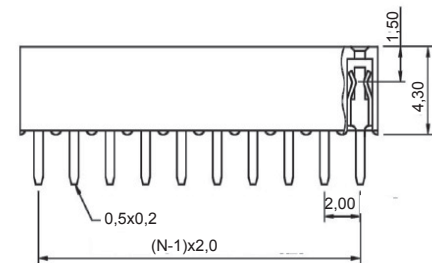






Buchsenleisten Raster 2,00mm / Female Header pitch 2,00mm

Serie 130




Bauhöhe 4,30(2,80)mm
 total height 4,30(2,80)mm
 Für Vierkantstift 0,50mm
 for square pin 0,50mm

Raster / Pitch
2,00mm

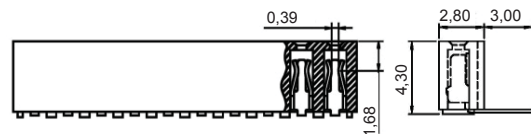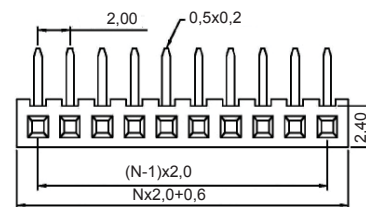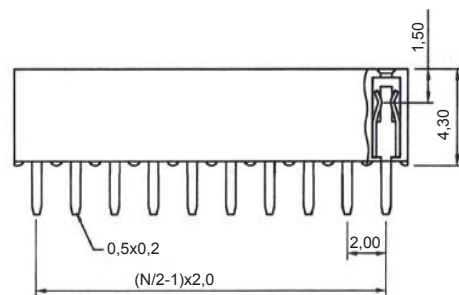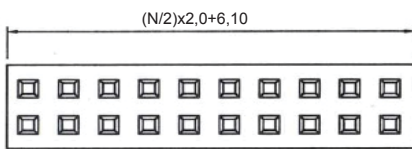

Empfohlenes Leiterplatten Layout
 Recommended P.C.B. Layout
 (PCB Tolerance ±0,05)



Technische Daten / Technical Data
 Isolierkörper / Insulator
 Kontaktmaterial / Contact material
 Nennspannung / Current Voltage
 Nennstrom / Current Rating
 Temperaturbereich / Temperatur Range
 Lötwärmebeständigkeit / Resistance soldering

Nylon 6T (UL94-V0)
 Phosphor Bronze
 250V AC
 2A
 -40°C...+105°C
 235°C (30-60 sec.)
 260°C (10 sec.)

weitere Informationen auf Anfrage / more information on request

Bestellbeispiel
 How to order

Bitte ersetzen Sie X durch unten aufgeführten Code
 Please replace X with coding listed below

130 00 XX X X X X X X

Veredelung / Plating
 FL= Flash vergoldet / flash gold plating 00= verzinkt / tin plating
 (andere Veredelungen auf Anfrage / other platings on request)

Anzahl Reihe / Number of row
 1= 1-reihig / 1-row 2= 2-reihig / 2-row

Ausführung / Version
 1= gerade / straight 2=gewinkelt (nur 1-reihig) / right angled (only 1-row)

Raster / Pitch
 8= 2,0mm 9= Sonderraster / other pitch

Polzahl / Number of contacts
 002...040 (1-reihig / 1-row), 004...080 (2-reihig / 2-row)