

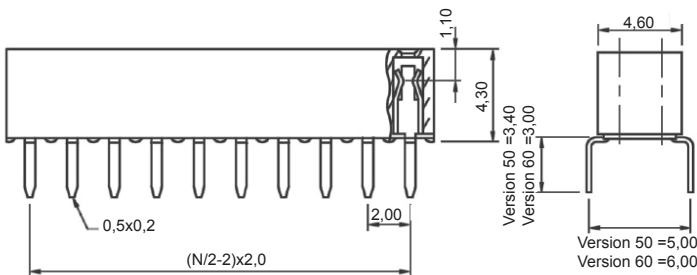
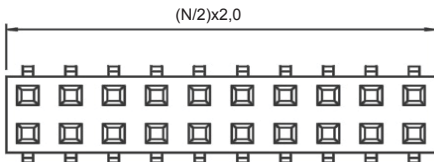
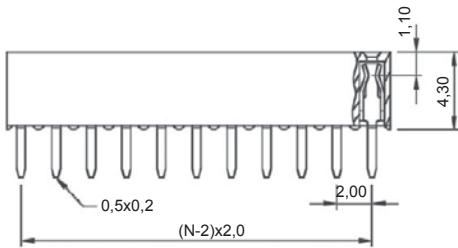


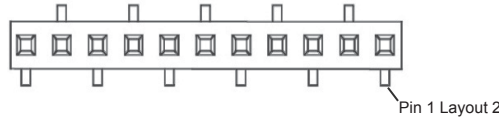

Buchsenleisten Raster 2,00mm/ Female Header pitch 2,00mm

Serie 137

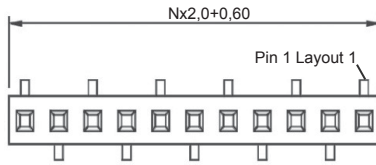


Bauhöhe 4,30mm
total height 4,30mm

Für Vierkantstift 0,50mm
for square pin 0,50mm



Raster / Pitch
2,00mm

Empfohlenes Leiterplatten Layout
Recommended P.C.B. Layout
(PCB Tolerance $\pm 0,05$)

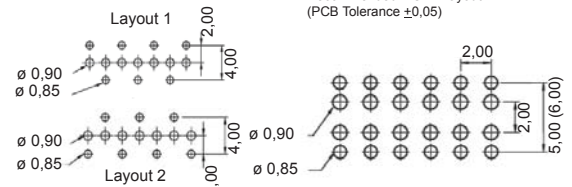

Technische Daten / Technical Data

Isolierkörper / Insulator	Nylon 6T (UL94-V0)
Kontakmaterial / Contact material	Phosphor Bronze
Nennspannung / Current Voltage	250V AC
Nennstrom / Current Rating	2A
Temperaturbereich / Temperatur Range	-25°C...+105°C
Lötwärmebeständigkeit / Resistance soldering	235°C (30-60 sec.)
	260°C (10 sec.)

weitere Informationen auf Anfrage / more information on request

Bestellbeispiel
How to order

Bitte ersetzen Sie X durch unten aufgeführten Code
Please replace X with coding listed below

Lötpin- Abstand / Solder pin distance
40= 4,0mm (1-reihig / 1-row)
50= 5,0mm (2-reihig / 2-row)
60= 6,0mm (2-reihig / 2-row)

Veredelung / Plating
FL= Flash vergoldet / flash gold plating 00= verzinkt / tin plating
(andere Veredelungen auf Anfrage / other platings on request)

Anzahl Reihe / Number of row
1= 1-reihig / 1-row 2= 2-reihig / 2-row

Ausführung / Version
1= gerade / straight

Raster / Pitch
8= 2,0mm 9= Sonderraster / other pitch

1= Layout 1 (nur 1-reihig / only 1-row)
2= Layout 2 (nur 1-reihig / only 1-row)
0= 2-reihig / 2-row

Polzahl / Number of contacts
03...40 (1-reihig / 1-row) 04...80 (2-reihig / 2-row)

137 XX XX X 1 X X X X