

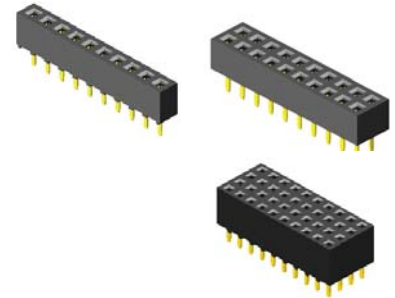





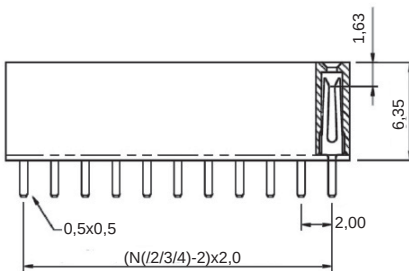

Buchsenleisten Raster 2,00mm / Female Header pitch 2,00mm

Serie 141

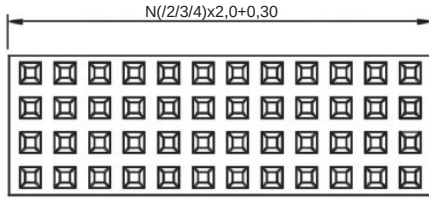


Bauhöhe 6,30mm
total height 6,30mm

Für Vierkantstift 0,50mm
for square pin 0,50mm



Raster / Pitch
2,00mm

Empfohlenes Leiterplatten Layout
Recommended P.C.B. Layout
(PCB Tolerance $\pm 0,05$)



Technische Daten / Technical Data

Isolierkörper / Insulator	Nylon 6T (UL94-V0)
Kontaktmaterial / Contact material	Phosphor Bronze
Nennspannung / Current Voltage	250V AC
Nennstrom / Current Rating	2A
Temperaturbereich / Temperatur Range	-25°C...+105°C
Lötwärmebeständigkeit / Resistance soldering	235°C (30-60 sec.)
	260°C (10 sec.)

weitere Informationen auf Anfrage / more information on request

Bestellbeispiel How to order

Bitte ersetzen Sie X durch unten aufgeführten Code Please replace X with coding listed below

141	00	XX	X	1	X	X	X	X
-----	----	----	---	---	---	---	---	---

Veredelung / Plating

FL= Flash vergoldet / flash gold plating 00= verzinkt / tin plating
(andere Veredelungen auf Anfrage / other platings on request)

Anzahl Reihe / Number of row

1= 1-reihig / 1-row 2= 2-reihig / 2-row 3= 3-reihig / 3-row 4= 4-reihig / 4-row

Ausführung / Version

1= gerade / straight

Raster / Pitch

8= 2,0mm 9= Sonderraster / other pitch

Polzahl / Number of contacts

003...040 (1-reihig / 1-row) 004...080 (2-reihig / 2-row) 009...120 (3-reihig / 3-row) 016...120 (4-reihig / 4-row)