

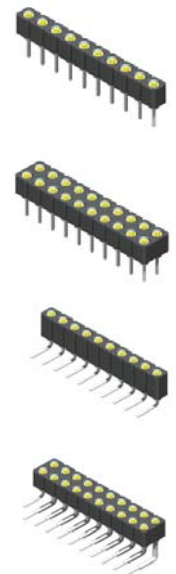
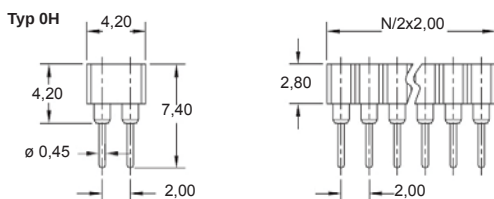
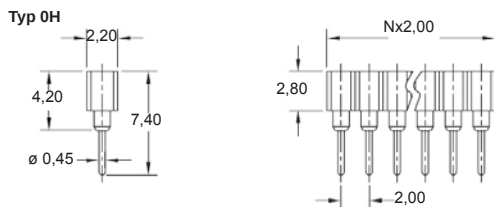
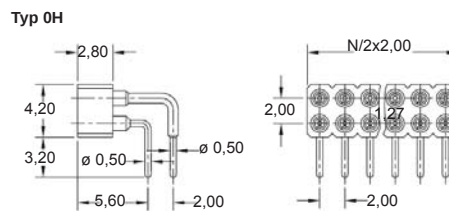
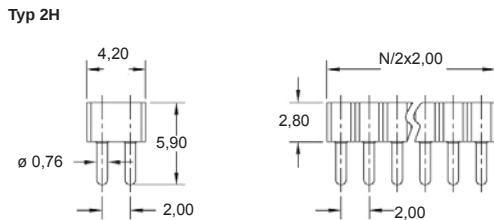


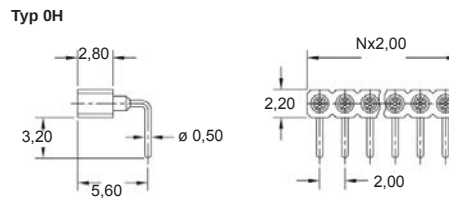

Buchsenleisten Raster 2,00mm / Female Header pitch 2,00mm

Serie 164

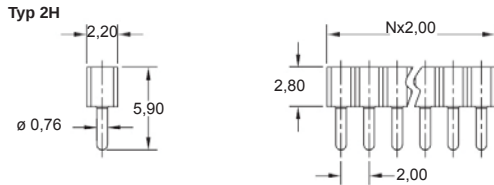


Raster / Pitch
2,00mm

Bauhöhe 2,20/2,80/4,20mm
Total height 2,20/2,80/4,20mm

Für Rundstift 0,40-0,66mm
und Vierkant 0,50 mm
for round pin 0,40-0,66mm
and square contact 0,50mm



Empfohlenes Leiterplatten Layout
Recommended P.C.B. Layout
(PCB Tolerance $\pm 0,05$)



Technische Daten / Technical Data
Isolierkörper / Insulator
Kontakmaterial / Contact material
Nennspannung / Current Voltage
Nennstrom / Current Rating
Temperaturbereich / Temperatur Range
Lötarmbeständigkeit / Resistance soldering

PPS-GF30-FR (UL94-V0)
Brass CuZn36PB3
250V AC
3 A
-55°C...+125°C
235°C (30-60 sec.)
260°C (10 sec.)

weitere Informationen auf Anfrage / more information on request

Bestellbeispiel
How to order

Bitte ersetzen Sie X durch unten aufgeführten Code
Please replace X with coding listed below

164 XX XX X X X X X X

0H= Gerade, gewinkelt / straight, right angled
2H= Gerade / straight (Bauhöhe 2,8mm / total height 2,8mm)

Veredelung / Plating
SF= Selektiv Flash vergoldet / selective flash gold plating
(andere Veredelungen auf Anfrage / other platings on request)

Anzahl Reihe / Number of row
1= 1-reihig / 1-row, 2= 2-reihig / 2-row

Ausführung / Version
1= gerade / straight 2= gewinkelt / right angled

Raster / Pitch
8= 2,00mm 9= Sonderraster / other pitch

Polzahl / Number of contacts
002...040 (1-reihig / 1-row) 004...080 (2-reihig / 2-row)