






Stiftheiten Raster 2,54mm / Pin Header pitch 2,54mm

Serie 023

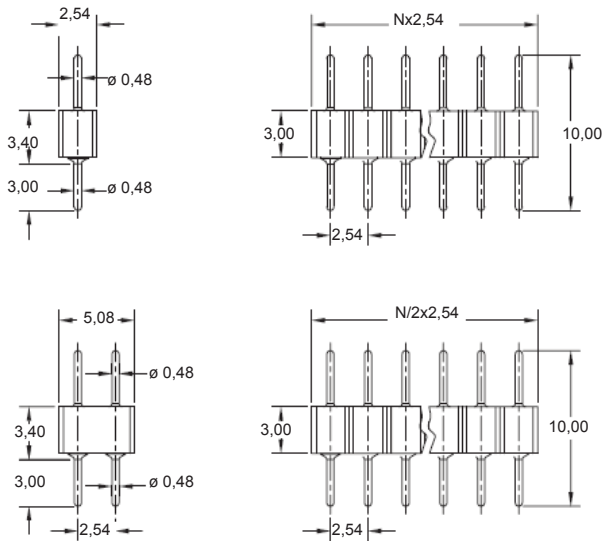

Raster / Pitch
2,54mm

Empfohlenes Leiterplatten Layout
 Recommended P.C.B. Layout
 (PCB Tolerance ±0,05)



Technische Daten / Technical Data
 Isolierkörper / Insulator
 Kontaktmaterial / Contact material
 Nennspannung / Current Voltage
 Nennstrom / Current Rating
 Temperaturbereich / Temperatur Range
 Lötwärmebeständigkeit / Resistance soldering

PPS-GF30-FR (UL94-V0)
 Brass CuZn36PB3
 250V AC
 3 A
 -55°C...+125°C
 235°C (30-60 sec.)
 260°C (10 sec.)

weitere Informationen auf Anfrage / more information on request

Bestellbeispiel
 How to order

Bitte ersetzen Sie X durch unten aufgeführten Code
 Please replace X with coding listed below

023	0H	XX	X	1	X	X	X
-----	----	----	---	---	---	---	---

Veredelung / Plating

00= verzinkt / tin plating SF= selektiv flash vergoldet / selective gold plating
 (andere Veredelungen auf Anfrage / other platings on request)

Anzahl Reihe / Number of row

1= 1-reihig / 1-row 2= 2-reihig / 2-row

Ausführung / Version

1= gerade / straight

Raster / Pitch

2= 2,54mm 3= 5,08mm 9= Sonderraster / other pitch

Polzahl / Number of contacts

002...036 (1-reihig / 1-row) 004...072 (2-reihig / 2-row)