






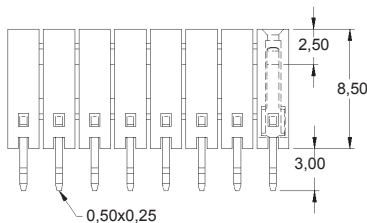





Buchsenleisten Raster 2,54mm / Female Header pitch 2,54mm

Serie 196


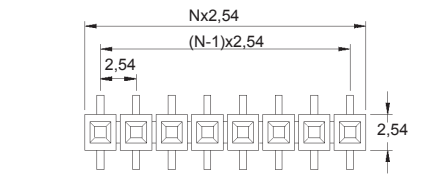


Bauhöhe 8,50mm
total height 8,50mm

Für Vierkantstift 0,64mm
for square pin 0,64mm

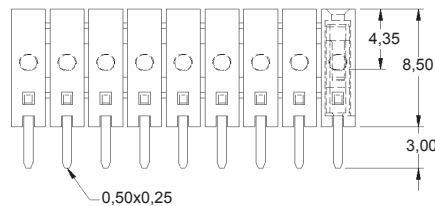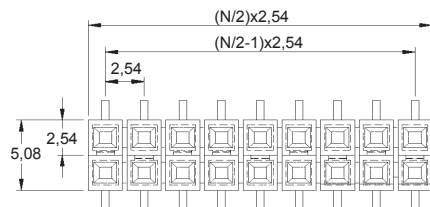

Empfohlenes Leiterplatten Layout
Recommended P.C.B. Layout
(PCB Tolerance $\pm 0,05$)



Technische Daten / Technical Data
Isolierkörper / Insulator
Kontaktmaterial / Contact material
Nennspannung / Current Voltage
Nennstrom / Current Rating
Temperaturbereich / Temperatur Range
Lötlösbarkeit / Resistance soldering

Nylon 6T (UL94-V0)
Phosphor Bronze
250V AC
3A
-40°C...+105°C
235°C (30-60 sec.)
260°C (10 sec.)

weitere Informationen auf Anfrage / more information on request

Bestellbeispiel
How to order

Bitte ersetzen Sie X durch unten aufgeführten Code
Please replace X with coding listed below

Lötinnenabstand „A“ / Solderpin distance „A“

H1= 3,17mm H2= 3,96mm H3= 5,08mm (1-reihig / 1-row)
H6= 6,50mm H7= 7,62mm (2-reihig / 2-row)

Veredelung / Plating

00= verzinkt / tin plating FL= flash vergoldet / flash gold plating
(andere Veredelungen auf Anfrage / other platings on request)

Anzahl Reihe / Number of row

1= 1-reihig / 1-row 2= 2-reihig / 2-row

Ausführung / Version

1= gerade / straight

Raster / Pitch

2= 2,54mm 3= 5,08mm 9= Sonderraster / other pitch

Polzahl / Number of contacts

002...040 (1-reihig / 1-row) 004...080 (2-reihig / 2-row)

01= verpackt in Stangen / packed in tube (Standard)

03= Schüttgut / Bulk packed

196	XX	XX	X	1	X	X	X	X	-	X	X
-----	----	----	---	---	---	---	---	---	---	---	---