




1.0mm Terminal / Housing / Wafer SMT R/A Type

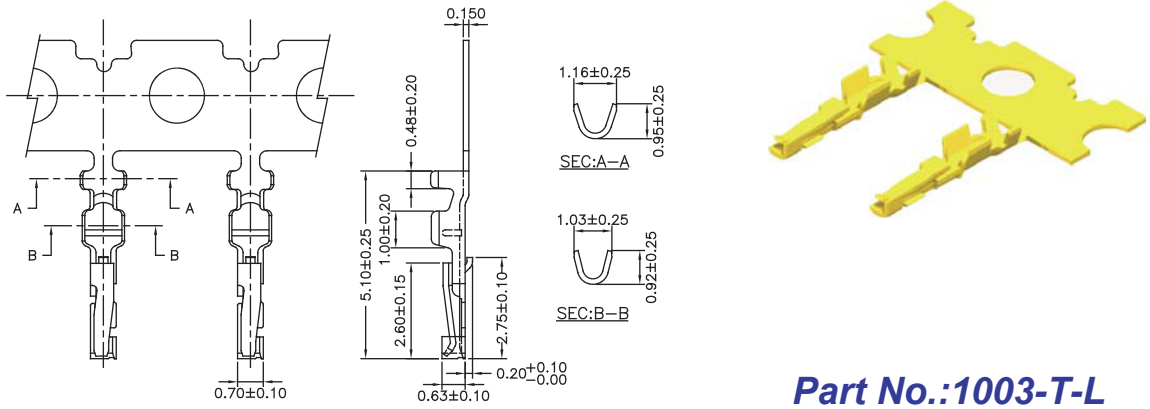

Part No.:1003-T-L


Wire Range	Insulation O.D.	Material	Finish
AWG#28-#32	0.60mm(max)	Phosphor Bronze	Gold Plated

Specifications

Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: 500V AC/minute
 Shell: Phosphor Bronze / Nickel Plated
 Material:Nylon 66,UL94V-0

Part No.	Dimensions	
	A	B
1003H-08W-U	7.00	11.50
1003H-14W-U	13.00	17.50
1003H-20W-U	19.00	23.50
1003H-30W-U	29.00	33.50

Part No.:1003H-XXW-L

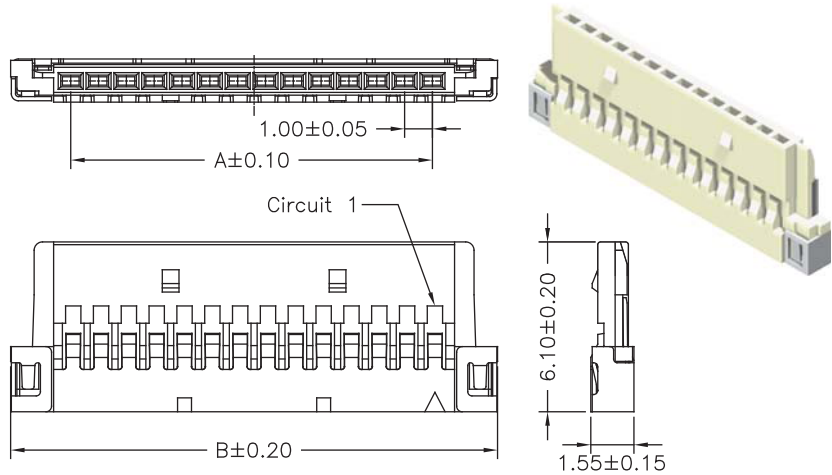

Specifications

Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: 500V AC/minute
 Shell: Phosphor Bronze / Tin Plated
 Terminal: Phosphor Bronze / Gold Plated
 Material:Nylon 6T,UL94V-0

Part No.	Dimensions		
	A	B	C
1003MR-08TW-U	7.00	11.55	11.95
1003MR-14TW-U	13.00	17.55	17.95
1003MR-20TW-U	19.00	23.55	23.95
1003MR-30TW-U	29.00	33.55	33.95

Part No.:1003MR-XXTW-U

