




1.25mm Terminal / Housing

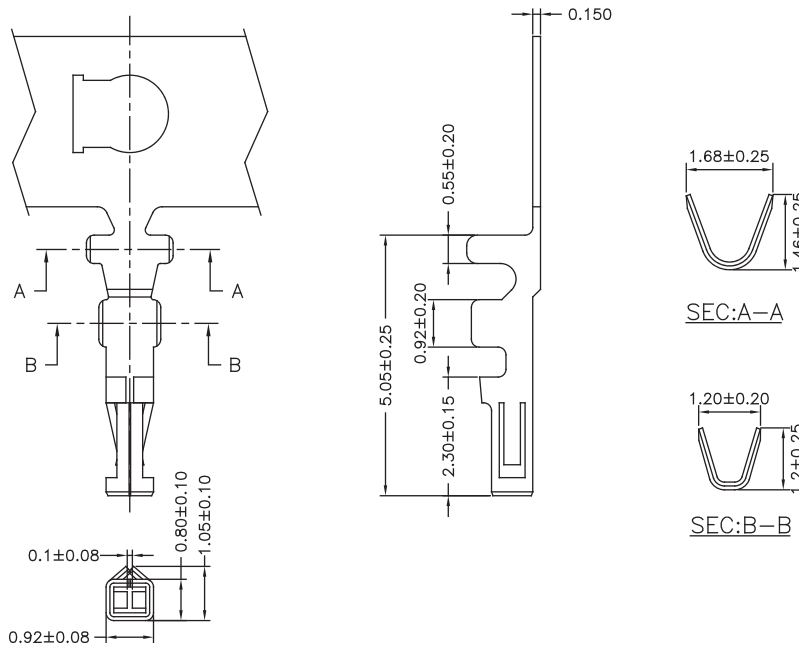


Part No.	Wire Range	Insulation O.D.	Material	Finish
1255-TGP-L	AWG#28-#32	0.90mm(max)	Phosphor Bronze	Gold-plated
1255-TTP-L	AWG#28-#32	0.90mm(max)	Phosphor Bronze	Tin Plated

Part No.:1255-T-L



Specifications

Current Rating: 1A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 40mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 500V AC/minute
 Material:Nylon 66,UL94V-0

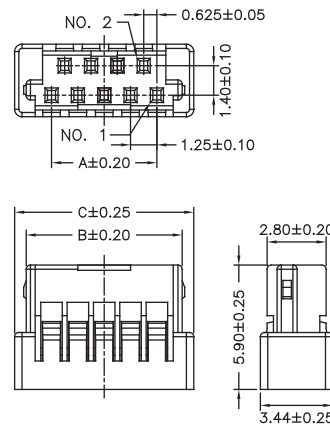

Part No.	Dimensions		
	A	B	C
1256H-05B-L	2.50	4.90	6.00
1256H-07B-L	3.75	6.15	7.25
1256H-09B-L	5.00	7.40	8.50
1256H-11B-L	6.25	8.65	9.75
1256H-13B-L	7.50	9.90	11.00
1256H-15B-L	8.75	11.15	12.25
1256H-17B-L	10.00	12.40	13.50
1256H-19B-L	11.25	13.65	14.75
1256H-21B-L	12.50	14.90	16.00
1256H-31B-L	18.75	21.15	22.25
1256H-41B-L	25.00	27.40	28.50

5,7,9,11 Contacts

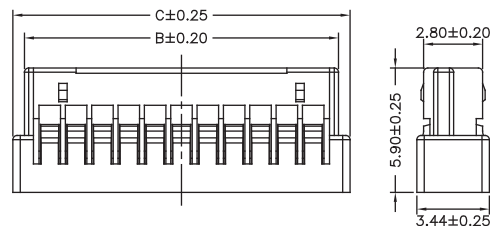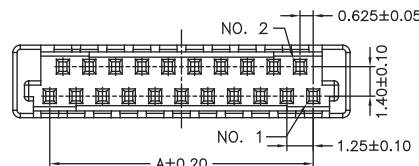

13,15,17,19,21,31,41 Contacts

Part No.:1256H-XXB-L



1.25mm Wafer SMT Straight / SMT R/A Type





Specifications

Current Rating: 1A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 40mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 500V AC/minute
 Terminal: Phosphor Bronze / Gold Plated 3u"
 Shell: Phosphor Bronze / Tin Plated
 Material:Nylon 6T,UL94V-0

Part No.:1256MS-XXGB-U



1: WITH POST
 2: W/O POST

Part No.	Dimensions		
	A	B	C
1256MS-21GB-U	12.50	16.85	11.25
1256MS-31GB-U	18.75	23.10	17.50

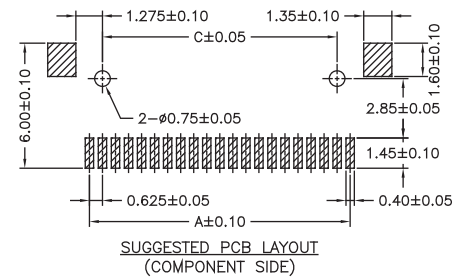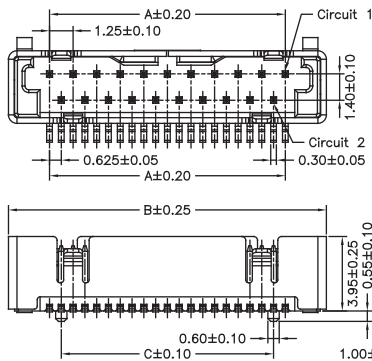



Specifications

Current Rating: 1A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 40mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 500V AC/minute
 Terminal: Phosphor Bronze / Gold Plated 3u"
 Shell: Phosphor Bronze / Tin Plated
 Material:Nylon 6T,UL94V-0

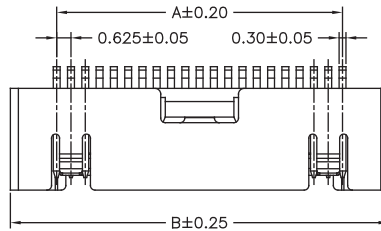


Part No.	Dimensions	
	A	B
1256MR-21GB-U	12.50	16.55
1256MR-31GB-U	18.75	22.80
1256MR-41GB-U	25.00	29.05

Part No.:1256MR-XXGB-U

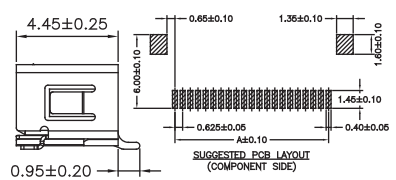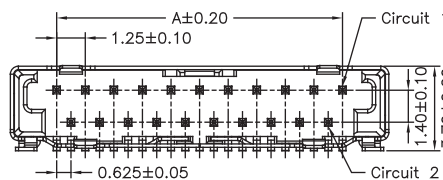



Specifications

Current Rating: 1A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 40mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 500V AC/minute
 Terminal: Phosphor Bronze / Gold Plated 3u"
 Shell: Phosphor Bronze / Tin Plated
 Material:Nylon 6T,UL94V-0



Part No.	Dimensions	
	A	B
1256MRA-05GB-U	2.50	6.10
1256MRA-07GB-U	3.75	7.35
1256MRA-09GB-U	5.00	8.60
1256MRA-11GB-U	6.25	9.85
1256MRA-13GB-U	7.50	11.10
1256MRA-15GB-U	8.75	12.35
1256MRA-17GB-U	10.00	13.60
1256MRA-19GB-U	11.25	14.85
1256MRA-21GB-U	12.50	16.10
1256MRA-31GB-U	18.75	22.35
1256MRA-41GB-U	25.00	28.60

Part No.:1256MRA-XXGB-U

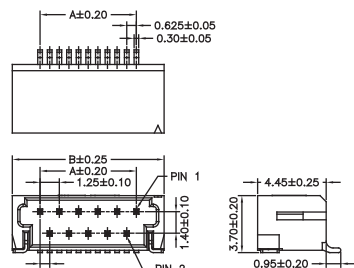

13,15,17,19,21,31,41 Contacts

5,7,9,11 Contacts