




2.0mm Terminal / Housing

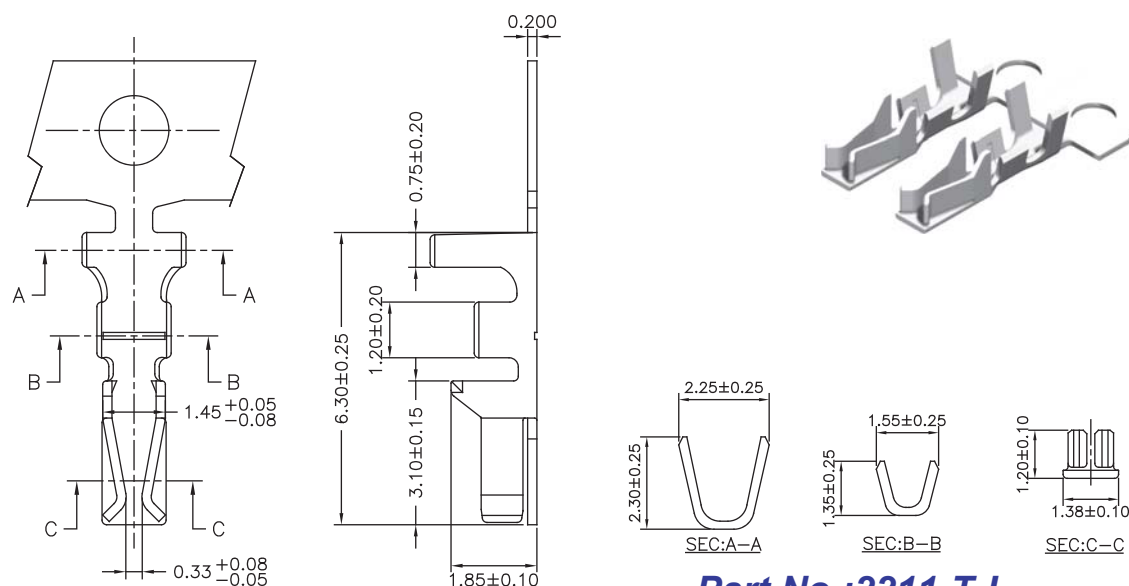


Wire Range	Insulation O.D.	Material	Finish
AWG#22-#30	1.45mm(max)	Phosphor Bronze	Tin Plated

Specifications

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Material:Nylon 66,UL94V-0

Part No.	Dimensions	
	A	B
2211H-202B-L	2.00	6.00
2211H-203B-L	4.00	8.00
2211H-204B-L	6.00	10.00
2211H-205B-L	8.00	12.00
2211H-206B-L	10.00	14.00
2211H-207B-L	12.00	16.00
2211H-208B-L	14.00	18.00
2211H-209B-L	16.00	20.00
2211H-210B-L	18.00	22.00
2211H-211B-L	20.00	24.00
2211H-212B-L	22.00	26.00
2211H-213B-L	24.00	28.00
2211H-214B-L	26.00	30.00
2211H-215B-L	28.00	32.00
2211H-216B-L	30.00	34.00
2211H-217B-L	32.00	36.00
2211H-218B-L	34.00	38.00
2211H-219B-L	36.00	40.00
2211H-220B-L	38.00	42.00

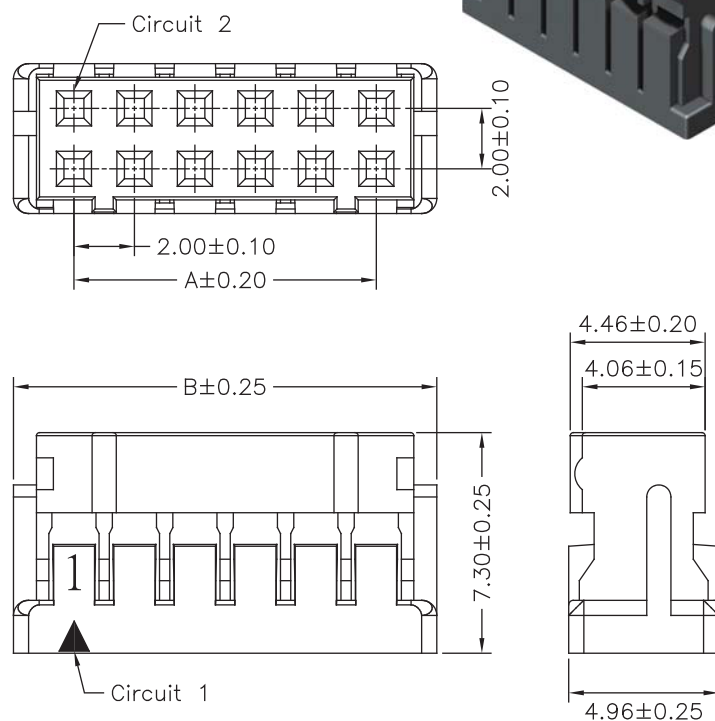








2.0mm Wafer SMT / Right Angle / Straight Type

Specifications

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Terminal: Brass / Gold Plated
Material: Nylon 6T, UL94V-0

Part No.	Dimensions		
	A	B	C
2211MS-202GW-U	2.00	6.00	4.00
2211MS-203GW-U	4.00	8.00	6.00
2211MS-204GW-U	6.00	10.00	8.00
2211MS-205GW-U	8.00	12.00	10.00
2211MS-206GW-U	10.00	14.00	12.00
2211MS-207GW-U	12.00	16.00	14.00
2211MS-208GW-U	14.00	18.00	16.00
2211MS-209GW-U	16.00	20.00	18.00
2211MS-210GW-U	18.00	22.00	20.00
2211MS-211GW-U	20.00	24.00	22.00
2211MS-212GW-U	22.00	26.00	24.00
2211MS-213GW-U	24.00	28.00	26.00
2211MS-214GW-U	26.00	30.00	28.00
2211MS-215GW-U	28.00	32.00	30.00
2211MS-216GW-U	30.00	34.00	32.00
2211MS-220GW-U	38.00	42.00	40.00







P C B LAYOUT

Part No.: 2211MS-2XXGW-U

Specifications

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Terminal: Brass / Tin Plated
Material: Nylon 66, UL94V-0

Part No.	Dimensions		Part No.	Dimensions	
	A	B		A	B
2211R-202TB-L	2.00	6.00	2211R-212TB-L	22.00	26.00
2211R-203TB-L	4.00	8.00	2211R-213TB-L	24.00	28.00
2211R-204TB-L	6.00	10.00	2211R-214TB-L	26.00	30.00
2211R-205TB-L	8.00	12.00	2211R-215TB-L	28.00	32.00
2211R-206TB-L	10.00	14.00	2211R-216TB-L	30.00	34.00
2211R-207TB-L	12.00	16.00	2211R-217TB-L	32.00	36.00
2211R-208TB-L	14.00	18.00	2211R-218TB-L	34.00	38.00
2211R-209TB-L	16.00	20.00	2211R-219TB-L	36.00	40.00
2211R-210TB-L	18.00	22.00	2211R-220TB-L	38.00	42.00
2211R-211TB-L	20.00	24.00			







P C B LAYOUT

Part No.: 2211R-2XXTB-L

Specifications

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Terminal: Brass / Tin Plated
Material: Nylon 66, UL94V-0

Part No.	Dimensions		Part No.	Dimensions	
	A	B		A	B
2211S-202TB-L	2.00	6.00	2211S-212TB-L	22.00	26.00
2211S-203TB-L	4.00	8.00	2211S-213TB-L	24.00	28.00
2211S-204TB-L	6.00	10.00	2211S-214TB-L	26.00	30.00
2211S-205TB-L	8.00	12.00	2211S-215TB-L	28.00	32.00
2211S-206TB-L	10.00	14.00	2211S-216TB-L	30.00	34.00
2211S-207TB-L	12.00	16.00	2211S-217TB-L	32.00	36.00
2211S-208TB-L	14.00	18.00	2211S-218TB-L	34.00	38.00
2211S-209TB-L	16.00	20.00	2211S-219TB-L	36.00	40.00
2211S-210TB-L	18.00	22.00	2211S-220TB-L	38.00	42.00
2211S-211TB-L	20.00	24.00			

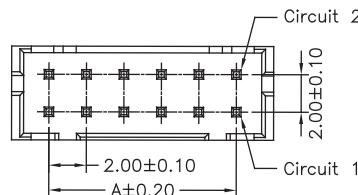

P C B LAYOUT

Part No.: 2211S-2XXTB-L