





2.5mm Terminal / Housing

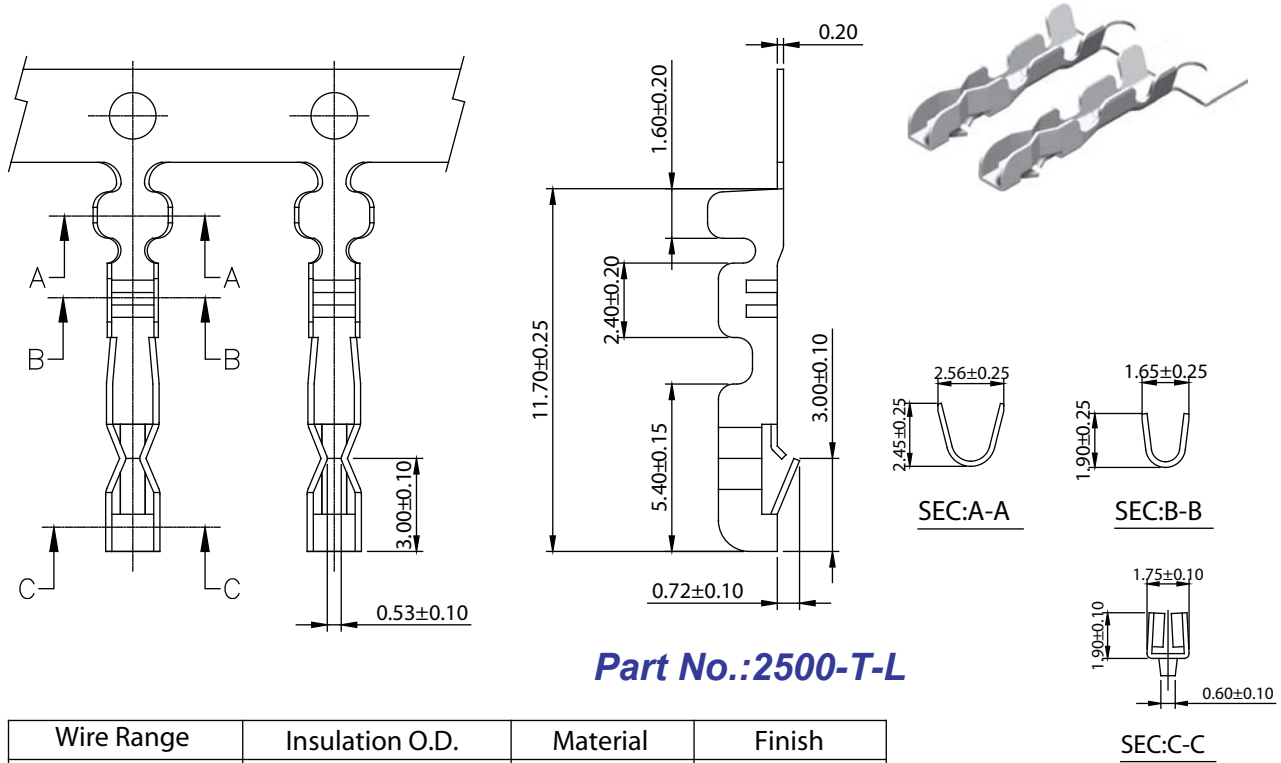

Specifications

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 500M Ω Min
 Withstanding Voltage: 800V AC/minute
 Material:Nylon 66,UL94V-0

Part No.	Dimensions		
	A	B	C
2500H-02W-L	2.50	7.25	5.90
2500H-03W-L	5.00	9.75	8.40
2500H-04W-L	7.50	12.25	10.90
2500H-05W-L	10.00	14.75	13.40
2500H-06W-L	12.50	17.25	15.90
2500H-07W-L	15.00	19.75	18.40
2500H-08W-L	17.50	22.25	20.90
2500H-09W-L	20.00	24.75	23.40
2500H-10W-L	22.50	27.25	25.90
2500H-11W-L	25.00	29.75	28.40
2500H-12W-L	27.50	32.25	30.90

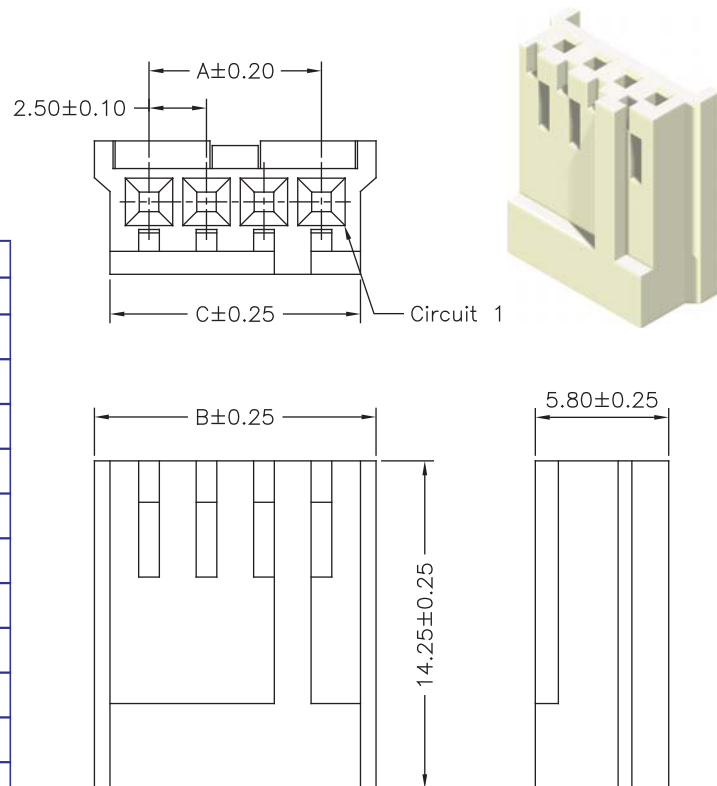

Part No.:2500H-XXW-L




2.5mm Wafer Right Angle / Straight Type

Specifications

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: 800V AC/minute
 Terminal:Brass / Tin Plated
 Material:Nylon 66,UL94V-0

Part No.	Dimensions	
	A	B
2500R-02TW-L	2.50	5.00
2500R-03TW-L	5.00	7.50
2500R-04TW-L	7.50	10.00
2500R-05TW-L	10.00	12.50
2500R-06TW-L	12.50	15.00
2500R-07TW-L	15.00	17.50
2500R-08TW-L	17.50	20.00
2500R-09TW-L	20.00	22.50
2500R-10TW-L	22.50	25.00
2500R-11TW-L	25.00	27.50
2500R-12TW-L	27.50	30.00

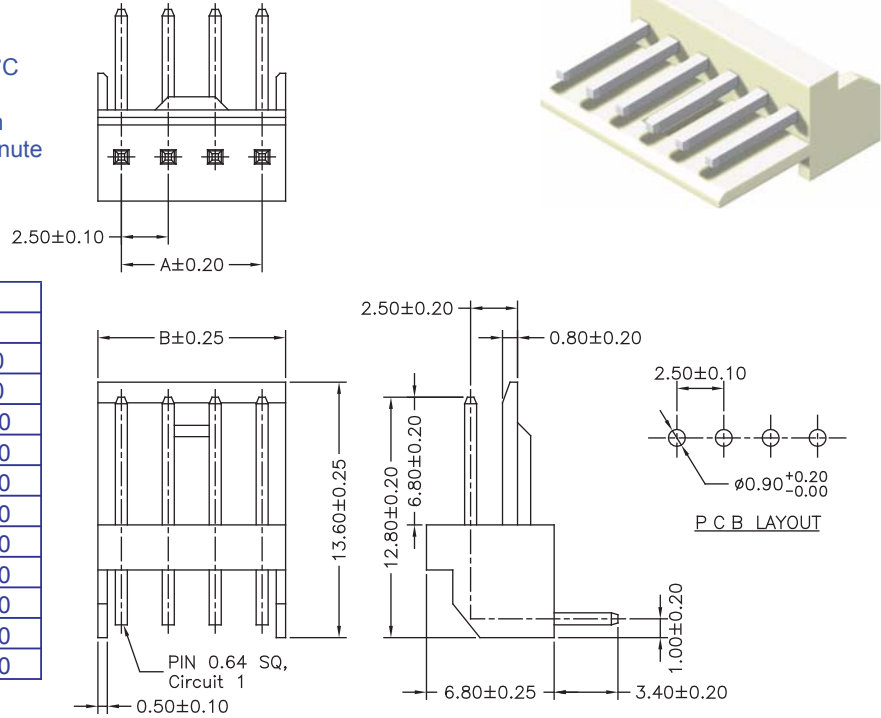


Part No.:2500R-XXTW-L

Specifications

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: 800V AC/minute
 Terminal:Brass / Tin Plated
 Material:Nylon 66,UL94V-0

Part No.	Dimensions	
	A	B
2500S-02TW-L	2.50	5.00
2500S-03TW-L	5.00	7.50
2500S-04TW-L	7.50	10.00
2500S-05TW-L	10.00	12.50
2500S-06TW-L	12.50	15.00
2500S-07TW-L	15.00	17.50
2500S-08TW-L	17.50	20.00
2500S-09TW-L	20.00	22.50
2500S-10TW-L	22.50	25.00
2500S-11TW-L	25.00	27.50
2500S-12TW-L	27.50	30.00

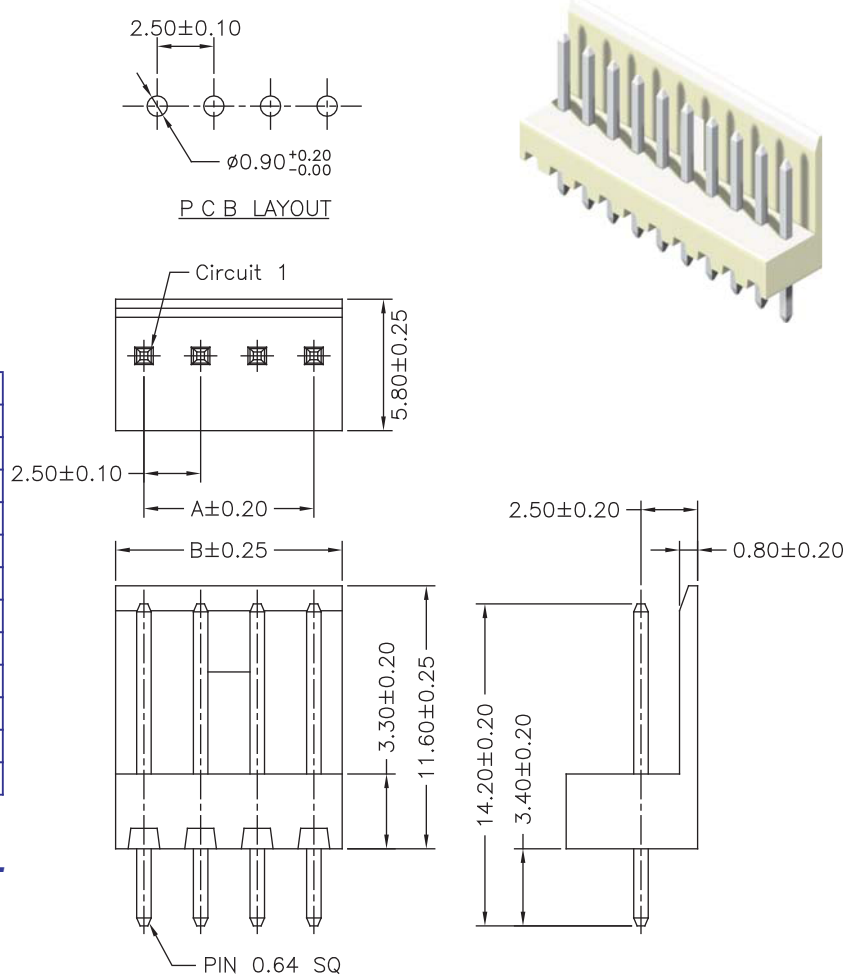

Part No.:2500S-XXTW-L