




2.5mm Terminal / Housing

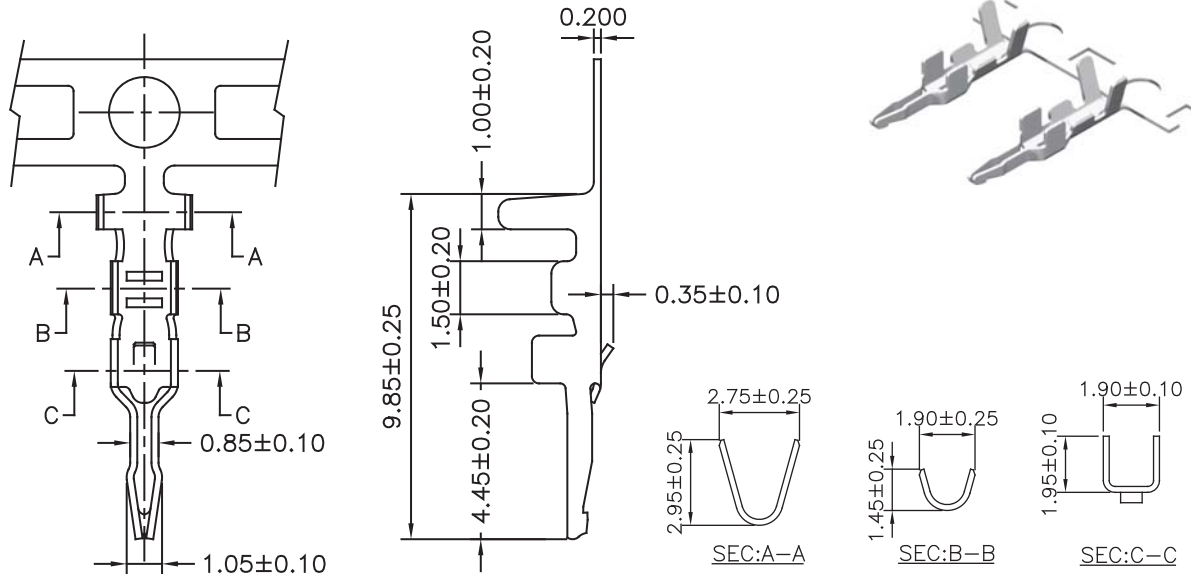


Part No.:2501-T-L



Wire Range	Insulation O.D.	Material	Finish
AWG#22-#28	1.70mm(max)	Brass	Tin Plated

Specifications



Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute
 Material:Nylon 66,UL94V-0



Part No.	Dimensions	
	A	B
2501H-02W-L	2.50	6.50
2501H-03W-L	5.00	9.00
2501H-04W-L	7.50	11.50
2501H-05W-L	10.00	14.00
2501H-06W-L	12.50	16.50
2501H-07W-L	15.00	19.00
2501H-08W-L	17.50	21.50
2501H-09W-L	20.00	24.00
2501H-10W-L	22.50	26.50
2501H-11W-L	25.00	29.00
2501H-12W-L	27.50	31.50
2501H-13W-L	30.00	34.00
2501H-14W-L	32.50	36.50
2501H-15W-L	35.00	39.00
2501H-16W-L	37.50	41.50

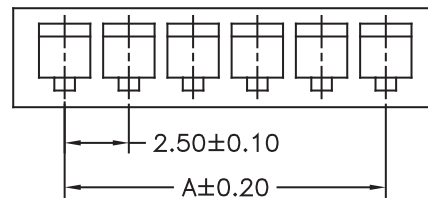

P.C.B. LAYOUT

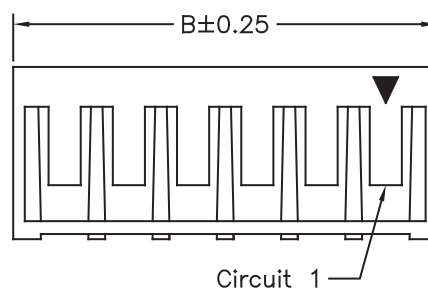

Part No.:2501H-XXW-L