




4.50mm Male Terminal / Female Housing

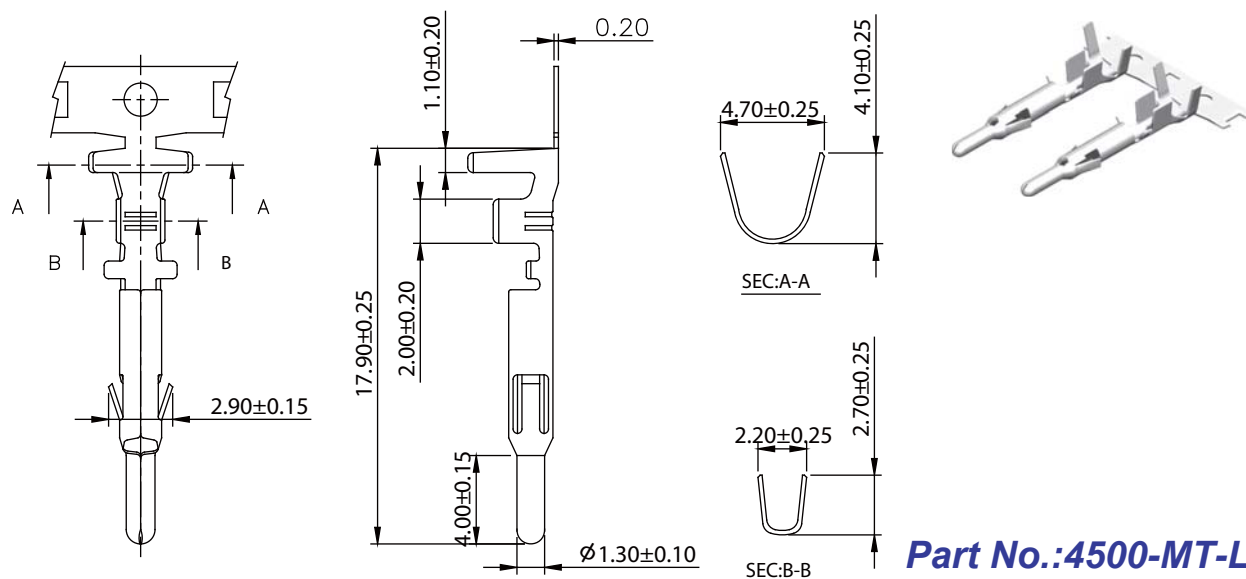


Part No.:4500-MT-L

Wire Range	Insulaion O.D.	Material	Finish
AWG#20-#24	2.70mm(max)	Brass	Tin Plated

Specifications

Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-0


Part No.	No. of Contacts
4500H-F102W-L	1x2
4500H-F103W-L	1x3
4500H-F104W-L	1x4
4500H-F202W-L	2x2
4500H-F203W-L	2x3
4500H-F303W-L	3x3
4500H-F304W-L	3x4
4500H-F305W-L	3x5

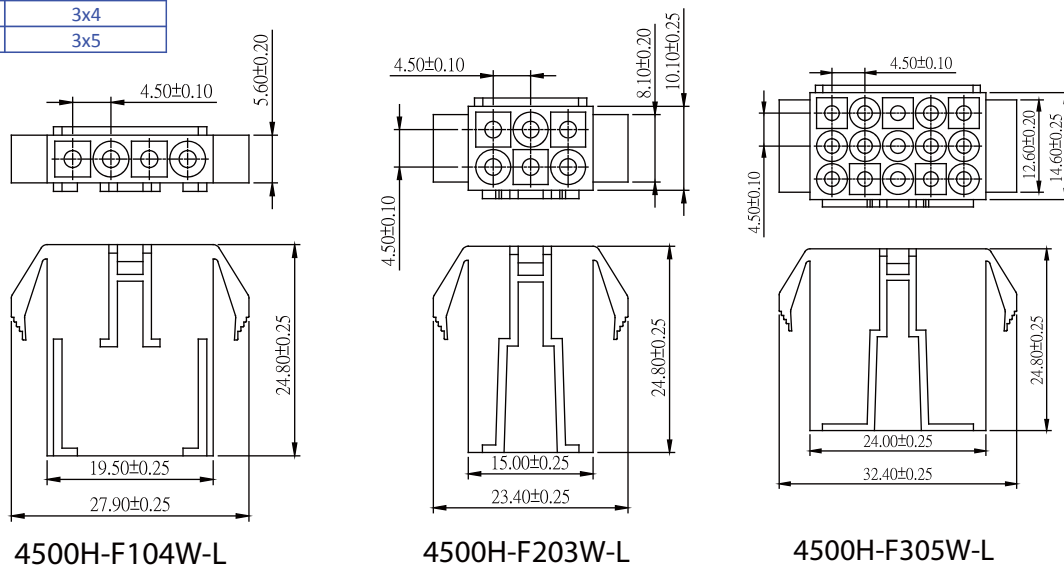

Part No.:4500H-FXXXW-L



4.5mm Female Terminal / Male Housing

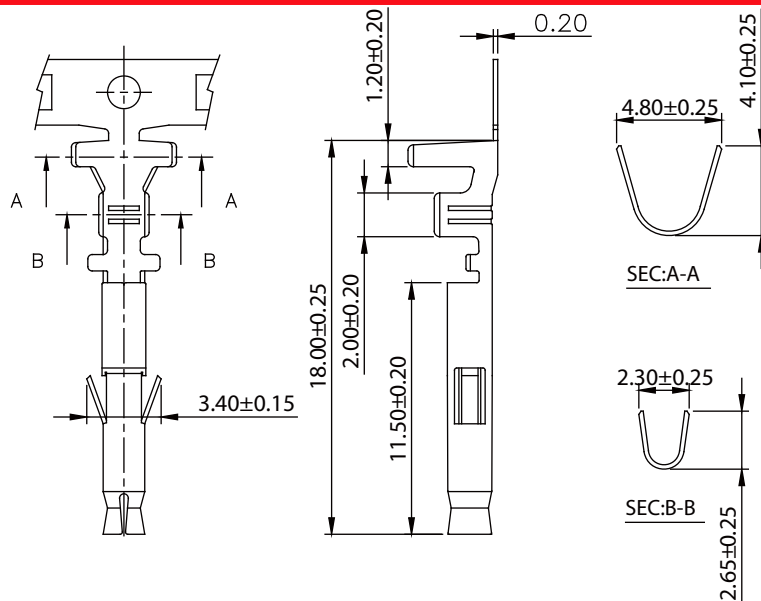




Part No.:4500-FT-L

Wire Range	Insulation O.D.	Material	Finish
AWG#20-#24	2.70mm(max)	Brass	Tin-plated


Specifications

Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-0


Part No.	No. of Contacts
4500H-M102W-L	1x2
4500H-M103W-L	1x3
4500H-M104W-L	1x4
4500H-M202W-L	2x2
4500H-M203W-L	2x3
4500H-M303W-L	3x3
4500H-M304W-L	3x4
4500H-M305W-L	3x5

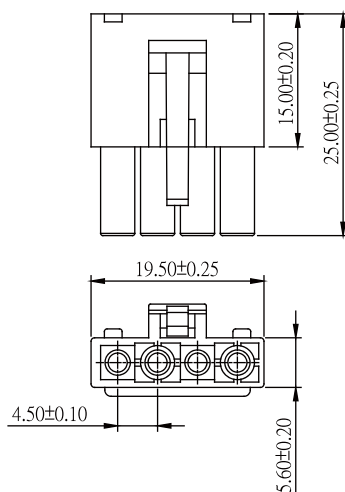

4500H-M104W-L

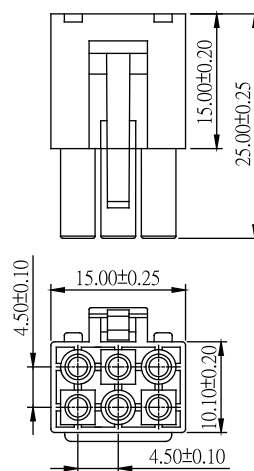

4500H-M203W-L

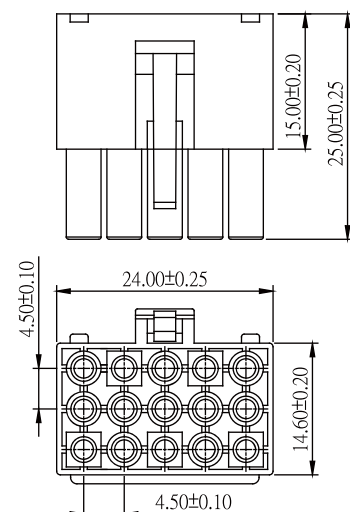

4500H-M305W-L

Part No.:4500H-MXXXW-L